

jc759 U.S. PRO
01/14/00

01-18-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL


(For new non-provisional applications under 37 CFR § 1.53(b))

jc511 U.S. PRO
09/483101



01/14/00

Att'y. Dkt. No:	5500-54700
Inventor(s): Kevin J. McGrath, Michael T. Clark	
Title:	Establishing an Operating Mode in a Processor

CERTIFICATE OF EXPRESS MAIL
 UNDER 37 C.F.R. §1.10
 "Express Mail" mailing label number: EL497319189US
 DATE OF DEPOSIT: January 14, 2000
 I hereby certify that this paper or fee is being deposited with the
 United States Postal Service "Express Mail Post Office to
 Addressee" service under 37 C.F.R. §1.10 on the date indicated
 above and is addressed to:
 Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

 Debra J. Lutz

Application Elements

1. ☒ Filing Fee

The filing fee is calculated as shown below.

Total Claims	22	-20=	2	x \$18.00=	\$36.00
Independent Claims	3	-3 =	0	x \$78.00=	\$0.00
Multiple Dependent Claims				Fee:	\$0.00
Basic Fee:					\$690.00
Assignment Fee					\$40.00
Sub-Total:					\$766.00
Reduction by 50% for Small Entity:					\$0.00
Total:					\$766.00

- ☒ A check in the amount of \$766.00 is enclosed.

The Commissioner is hereby authorized to charge any other fees which may be required or credit any overpayment to Conley, Rose, & Tayon, P.C., Deposit Account No. 03-2769/5500-54700/LJM.

One duplicate copy of this form is enclosed.

2. ☒ Specification
32 page(s) of specification; 4 page(s) of claims, 1 page(s) of abstract
3. ☒ Drawings
 Informal Figure(s) 1-12 on 9 sheet(s)
4. ☒ Oath or Declaration
☒ Newly executed
☐ Copy from a prior application (see 37 C.F.R. § 1.63(d))
 Deletion of Inventor(s) (in continuation or divisional applications)
☐ Delete the following inventor(s) named in the prior non-provisional application:

☐ The inventor(s) to be deleted are set forth on a signed sheet attached to this application.

5. ☐ The entire disclosure of the prior application referred to above is considered to be part of the accompanying application and is hereby incorporated by reference herein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- ☐ Computer Readable copy
- ☐ Paper Copy (identical to computer copy)
- ☐ Statement verifying identity of above copies
8. ☒ Assignment Papers
9. Power of Attorney
- ☒ Is attached.
- ☐ The power of attorney appears in the original papers of the prior application.
- ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
10. ☐ Information Disclosure Statement (IDS)
- ☐ Copies of IDS Citations
11. Amendments
- ☐ A preliminary amendment is enclosed.
- ☐ Cancel in this application claim(s) _____ before calculating the filing fee. At least one independent claim is retained for filing purposes.
- ☐ Amend the specification by inserting before the first line the sentence: _____.
12. ☒ Return Receipt Postcard
13. Small Entity Status
- ☐ A small entity statement is enclosed.
- ☐ A small entity statement was filed in the prior non-provisional application and such status is still proper and desired.
- ☐ Is no longer claimed.
14. ☐ Priority of foreign application number _____, filed on _____ in _____ is claimed under 35 U.S.C. §§ 119(a)-(d)
15. ☐ Petition under 37 C.F.R. § 136 for Extension of Time
16. ☐ Other: _____

Address all future correspondence to:

Lawrence J. Merkel
Conley, Rose, & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767
Phone: (512) 476-1400 Fax: (512) 703-1250

Signature

Name

Registration No.

Date

41,191

January 14, 2000

Lawrence J. Merkel

"EXPRESS MAIL" MAILING LABEL
NUMBER EL49731918925
DATE OF DEPOSIT JAN. 14, 2000
I HEREBY CERTIFY THAT THIS PAPER OR
FEE IS BEING DEPOSITED WITH THE
UNITED STATES POSTAL SERVICE
"EXPRESS MAIL POST OFFICE TO
ADDRESSEE" SERVICE UNDER 37 C.F.R.
§1.10 ON THE DATE INDICATED ABOVE
AND IS ADDRESSED TO THE ASSISTANT
COMMISSIONER FOR PATENTS,
WASHINGTON, D.C. 20231

Kevin J. McGrath
Michael T. Clark

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention is related to the field of processors and, more particularly, to address and operand sizes in processors.

2. Description of the Related Art

10 The x86 architecture (also known as the IA-32 architecture) has enjoyed widespread acceptance and success in the marketplace. Accordingly, it is advantageous to design processors according to the x86 architecture. Such processors may benefit from the large body of software written to the x86 architecture (since such processors may execute the software and thus computer systems employing the processors may enjoy
15 increased acceptance in the market due to the large amount of available software).

 As computer systems have continued to evolve, 64 bit address size (and sometimes operand size) has become desirable. A larger address size allows for programs having a larger memory footprint (the amount of memory occupied by the
20 instructions in the program and the data operated upon by the program) to operate within the memory space. A larger operand size allows for operating upon larger operands, or for more precision in operands. More powerful applications and/or operating systems may be possible using 64 bit address and/or operand sizes.

25 Unfortunately, the x86 architecture is limited to a maximum 32 bit operand size and 32 bit address size. The operand size refers to the number of bits operated upon by the processor (e.g. the number of bits in a source or destination operand). The address size refers to the number of bits in an address generated by the processor. Thus, processors employing the x86 architecture may not serve the needs of applications which

may benefit from 64 bit address or operand sizes.

SUMMARY OF THE INVENTION

5 The problems outlined above are in large part solved by a processor as described herein. The processor supports a first processing mode in which the address size is greater than 32 bits and the operand size may be 32 or 64 bits. The address size may be nominally indicated as 64 bits, although various embodiments of the processor may implement any address size which exceeds 32 bits, up to and including 64 bits, in the first
10 processing mode. The first processing mode may be established by placing an enable indication in a control register into an enabled state and by setting a first operating mode indication and a second operating mode indication in a segment descriptor to predefined states. Other combinations of the first operating mode indication and the second operating mode indication may be used to provide compatibility modes for 32 bit and 16
15 bit processing compatible with the x86 processor architecture (with the enable indication remaining in the enabled state). Advantageously, 64 bit processing may be provided while providing compatibility with the x86 processor architecture, and hence supporting existing code written to the x86 processor architecture.

20 Furthermore, by providing compatibility modes for 32 bit and 16 bit processing while the enable indication for the first processing mode remains in the enabled state in the control register, software compatibility may be simplified. For example, an operating system coded to take advantage of the first processing mode may still launch applications written to 32 or 16 bit modes. The processor may operate in the first processing mode
25 while executing operating system code. While executing application code, the processor may operate in 32 or 16 bit mode (as directed by the first and second operating mode indications in the corresponding segment descriptors). However, when a call to the operating system is performed or when an exception or interrupt causes operating system code to be executed, the enable indication may indicate to the processor that the operating

system code may be in the first processing mode and thus may allow for the first processing mode to be established at the switch (based on the first and second operating mode indications in the segment descriptor corresponding to the operating system).

5 Additionally, the processor may support the 16 and 32 bit x86 operating modes if the enable indication in the control register is in the disabled state. The first operating mode indication may be undefined if the enable indication is disabled, and the second operating mode indication may determine if the processor's operating mode is 16 or 32 bit. Such modes may be used, for example, if the processor supports a segment descriptor
10 which defines the first operating mode indication in a different fashion.

 Broadly speaking, a processor is contemplated. The processor comprises a segment register and a control register. The segment register is configured to store a segment selector identifying a segment descriptor including a first operating mode
15 indication and a second operating mode indication. The control register is configured to store an enable indication. Responsive to the enable indication, the first operating mode indication, and the second operating mode indication, the processor is configured to establish an operating mode.

20 Additionally, a processor is contemplated which comprises a segment register and a control register configured to store an enable indication. The segment register is configured to store a segment selector and information from a segment descriptor. The segment selector includes an index into a segment descriptor table stored in a memory to which the processor is coupled, and the segment descriptor is stored in the segment
25 descriptor table in an entry indicated by the index. The processor is configured to read the segment descriptor from the segment descriptor table responsive to the segment selector, and the segment descriptor includes an operating mode indication. The processor is configured to operate in an operating mode in which virtual addresses are greater than 32 bits responsive to the enable indication being in an enabled state and the

operating mode indication being in a first state.

Moreover, a method is contemplated. An operating mode is established in a processor in response to an enable indication in a control register within the processor, a first operating mode indication in a segment descriptor, and a second operating mode indication in the segment descriptor. Operands are fetched and addresses are generated in response to the operating mode.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the accompanying drawings in which:

Fig. 1 is a block diagram of one embodiment of a processor.

Fig. 2 is a block diagram of one embodiment of a segment descriptor for 32/64 mode.

Fig. 3 is a block diagram of one embodiment of a segment descriptor for compatibility mode.

Fig. 4 is a block diagram of operation in compatibility mode and in legacy mode according to one embodiment of the processor shown in Fig. 1.

Fig. 5 is a table illustrating one embodiment of operating modes as a function of segment descriptor and control register values.

Fig. 6 is a table illustrating one embodiment of the use of instruction prefixes to

override default operating modes.

Fig. 7 is a block diagram of one embodiment of a register.

5 Fig. 8 is a diagram illustrating one embodiment of a global descriptor table and a local descriptor table.

Fig. 9 is a block diagram of one embodiment of a 32/64 call gate descriptor.

10 Fig. 10 is a block diagram of an instruction format.

Fig. 11 is a block diagram of one embodiment of a computer system including the processor shown in Fig. 1.

15 Fig. 12 is a block diagram of another embodiment of a computer system including the processor shown in Fig. 1.

While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof are shown by way of example in the drawings and will
20 herein be described in detail. It should be understood, however, that the drawings and detailed description thereto are not intended to limit the invention to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the present invention as defined by the appended claims.

25

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Turning now to Fig. 1, a block diagram illustrating one embodiment of a processor 10 is shown. Other embodiments are possible and contemplated. In the

embodiment of Fig. 1, processor 10 includes an instruction cache 12, an execution core 14, a data cache 16, an external interface unit 18, a memory management unit (MMU) 20, and a register file 22. In the illustrated embodiment, MMU 20 includes a set of segment registers 24, a first control register 26, a second control register 28, a local descriptor
5 table register (LDTR) 30, and a global descriptor table register (GDTR) 32. Instruction cache 12 is coupled to external interface unit 18, execution core 14, and MMU 20. Execution core 14 is further coupled to MMU 20, register file 22, and data cache 16. Data cache 16 is further coupled to MMU 20 and external interface unit 18. External interface unit 18 is further coupled to MMU 20 and to an external interface.

10

Generally speaking, processor 10 employs a processor architecture compatible with the x86 architecture and including additional architectural features to support 64 bit processing. Processor 10 is configured to establish an operating mode in response to information stored in a code segment descriptor corresponding to the currently executing
15 code and further in response to one or more enable indications stored in one or more control registers. As used herein, an "operating mode" specifies default values for various programmably selectable processor attributes. For example, the operating mode may specify a default operand size and a default address size. The default operand size specifies the number of bits in an operand of an instruction, unless an instruction's
20 encoding overrides the default. The default address size specifies the number of bits in an address of a memory operand of an instruction, unless an instruction's encoding overrides the default. The default address size specifies the size of at least the virtual address of memory operands, and may also specify the size of the physical address. Alternatively, the size of the physical address may be independent of the default address size and may
25 instead be dependent on the LME bit described below (e.g. the physical address may be 32 bits if the LME bit is clear and an implementation-dependent size greater than 32 bits and less than 64 bits if the LME bit is set) or on another control bit (e.g. the physical address extension bit, or PAE bit, in another control register). As used herein, a "virtual address" is an address generated prior to translation through an address translation

mechanism (e.g. a paging mechanism) to a "physical address", which is the address actually used to access a memory. Additionally, as used herein, a "segment descriptor" is a data structure created by software and used by the processor to define access control and status for a segment of memory. A "segment descriptor table" is a table in memory
5 having multiple entries, each entry capable of storing a segment descriptor.

In the illustrated embodiment, MMU 20 generates an operating mode and conveys the operating mode to execution core 14. Execution core 14 executes instructions using the operating mode. More particularly, execution core 14 fetches operands having the
10 default operand size from register file 22 or memory (through data cache 16, if the memory operands are cacheable and hit therein, or through external interface unit 18 if the memory operands are noncacheable or miss data cache 16) unless a particular instruction's encoding overrides the default operand size, in which case the overriding operand size is used. Similarly, execution core 14 generates addresses of memory
15 operands, wherein the addresses have the default address size unless a particular instruction's encoding overrides the default address size, in which case the overriding address size is used. In other embodiments, the information used to generate the operating mode may be shadowed locally in the portions of processor 10 which use the operating mode (e.g. execution core 14), and the operating mode may be determined from
20 the local shadow copies.

As mentioned above, MMU 20 generates the operating mode responsive to a code segment descriptor corresponding to the code being executed and further responsive to one or more values in control registers. Information from the code segment descriptor is
25 stored in one of the segment registers 24 (a register referred to as CS, or code segment). Additionally, control register 26 stores an enable indication (LME) which is used to enable an operating mode in which the default address size is greater than 32 bits ("32/64 mode") as well as certain compatibility modes for the 32 bit and 16 bit operating modes. The default operand size may be 32 bits in 32/64 mode, but instructions may override the

default 32 bit operand size with a 64 bit operand size when desired. If the LME indication is in an enabled state, then 32/64 mode may be used in addition to 32 bit and 16 bit modes. If the LME indication is in a disabled state, then 32/64 mode is disabled. In one embodiment, the default address size in 32/64 mode may be implementation-
5 dependent but may be any value up to and including 64 bits. Furthermore, the size of the virtual address may differ in a given implementation from the size of the physical address in that implementation.

It is noted that enable indications may be described herein as bits with the enabled
10 state being the set state of the bit and the disabled state being the cleared state of the bit. However, other encodings are possible, including encodings in which multiple bits are used and encodings in which the enabled state is the clear state and the disabled state is the set state. Accordingly, the remainder of this description may refer to the LME indication in control register 26 as the LME bit, with the enabled state being set and the
15 disabled state being clear. However, other encodings of the LME indication are contemplated, as set forth above.

Segment registers 24 store information from the segment descriptors currently being used by the code being executed by processor 10. As mentioned above, CS is one
20 of segment registers 24 and specifies the code segment of memory. The code segment stores the code being executed. Other segment registers may define various data segments (e.g. a stack data segment defined by the SS segment register, and up to four data segments defined by the DS, ES, FS, and GS segment registers). Fig. 1 illustrates the contents of an exemplary segment register 24A, including a selector field 24AA and a
25 descriptor field 24AB. Selector field 24AA is loaded with a segment selector to activate a particular segment in response to certain segment load instructions executed by execution core 14. The segment selector identifies the segment descriptor in a segment descriptor table in memory. More particularly, processor 10 may employ two segment descriptor tables: a local descriptor table and a global descriptor table. The base address

of the local descriptor table is stored in the LDTR 30. Similarly, the base address of the global descriptor table is stored in GDTR 32. A bit within the segment selector (the table indicator bit) selects the descriptor table, and the remainder of the segment selector is used as an index into the selected table. When an instruction loads a segment selector

5 into one of segment registers 24, MMU 20 reads the corresponding segment descriptor from the selected segment descriptor table and stores information from the segment descriptor into the segment descriptor field (e.g. segment descriptor field 24AB for segment register 24A). The information stored in the segment descriptor field may comprise any suitable subset of the segment descriptor, including all of the segment

10 descriptor, if desired. Additionally, other information derived from the segment descriptor or other sources may be stored in the segment descriptor field, if desired. For example, an embodiment may decode the operating mode indications from the code segment descriptor and store the decoded value rather than the original values of the operating mode indications. If an instruction causes CS to be loaded with a segment

15 selector, the code segment may change and thus the operating mode of processor 10 may change. Segment descriptor tables are described in more detail below.

In one embodiment, only the CS segment register is used in 32/64 mode. The data segment registers are ignored. In 16 and 32 bit modes, the code segment and data

20 segments may be active. Furthermore, a second enable indication (PE) in control register 28 may affect the operation of MMU 20. The PE enable indication may be used to enable protected mode, in which segmentation and/or paging address translation mechanisms may be used. If the PE enable indication is in the disabled state, segmentation and paging mechanisms are disabled and processor 10 is in "real mode" (in which addresses

25 generated by execution core 14 are physical addresses). Similar to the LME indication, the PE indication may be a bit in which the enabled state is the bit being set and the disabled state is the bit being clear. However, other embodiments are contemplated as described above.

It is noted that MMU 20 may employ additional hardware mechanisms, as desired. For example, MMU 20 may include paging hardware to implement paging address translation from virtual addresses to physical addresses. The paging hardware may include a translation lookaside buffer (TLB) to store page translations.

5

It is noted that control registers 26 and 28 may be implemented as architected control registers (e.g. control register 26 may be CR4 and control register 28 may be CR0). Alternatively, one or both of the control registers may be implemented as model specific registers to allow for other uses of the architected control registers without interfering with 32/64 mode.

10

Generally, instruction cache 12 is a high speed cache memory for storing instruction bytes. Execution core 14 fetches instructions from instruction cache 12 for execution. Instruction cache 12 may employ any suitable cache organization, including direct-mapped, set associative, and fully associative configurations. If an instruction fetch misses in instruction cache 12, instruction cache 12 may communicate with external interface unit 18 to fill the missing cache line into instruction cache 12. Additionally, instruction cache 12 may communicate with MMU 20 to receive physical address translations for virtual addresses fetched from instruction cache 12. -

15

20

Execution core 14 executes the instructions fetched from instruction cache 12. Execution core 14 fetches register operands from register file 22 and updates destination registers in register file 22. The size of the register operands is controlled by the operating mode and any overrides of the operating mode for a particular instruction.

Similarly, execution core 14 fetches memory operands from data cache 16 and updates destination memory locations in data cache 16, subject to the cacheability of the memory operands and hitting in data cache 16. The size of the memory operands is similarly controlled by the operating mode and any overrides of the operating mode for a particular instruction. Furthermore, the size of the addresses of the memory operands generated by

25

execution core 14 is controlled by the operating mode and any overrides of the operating mode for a particular instruction.

Execution core 14 may employ any suitable construction. For example, execution
5 core 14 may be a superpipelined core, a superscalar core, or a combination thereof.
Execution core 14 may employ out of order speculative execution or in order execution,
according to design choice.

Register file 22 may include 64 bit registers which may be accessed as 64 bit, 32
10 bit, 16 bit, or 8 bit registers as indicated by the operating mode of processor 10 and any
overrides for a particular instruction. The register format for one embodiment is
described below with respect to Fig. 7. The registers included in register file 22 may
include the LEAX, LEBX, LECX, LEDX, LEDI, LESI, LESP, and LEBP registers.
Register file 22 may further include the LEIP register. Alternatively, execution core 14
15 may employ a form of register renaming in which any register within register file 22 may
be mapped to an architected register. The number of registers in register file 22 may be
implementation dependent for such an embodiment.

Data cache 16 is a high speed cache memory configured to store data. Data cache
20 16 may employ any suitable cache organization, including direct-mapped, set associative,
and fully associative configurations. If a data fetch or update misses in data cache 16,
data cache 16 may communicate with external interface unit 18 to fill the missing cache
line into data cache 16. Additionally, if data cache 16 employs a writeback caching
policy, updated cache lines which are being cast out of data cache 16 may be
25 communicated to external interface unit 18 to be written back to memory. Data cache 16
may communicate with MMU 20 to receive physical address translations for virtual
addresses presented to data cache 16.

External interface unit 18 communicates with portions of the system external to

processor 10. External interface unit 18 may communicate cache lines for instruction cache 12 and data cache 16 as described above, and may communicate with MMU 20 as well. For example, external interface unit 18 may access the segment descriptor tables and/or paging tables on behalf of MMU 20.

5

It is noted that processor 10 may include an integrated level 2 (L2) cache, if desired. Furthermore, external interface unit 18 may be configured to communicate with a backside cache in addition to communicating with the system.

10 Turning now to Fig. 2, a block diagram of one embodiment of a code segment descriptor 40 for 32/64 mode is shown. Other embodiments are possible and contemplated. In the embodiment of Fig. 2, code segment descriptor 40 comprises 8 bytes with the most significant 4 bytes illustrated above the least significant 4 bytes. The most significant four bytes are stored at a numerically larger address than the least
15 significant four bytes. The most significant bit of each group of four bytes is illustrated as bit 31 in Fig. 2 (and Fig. 3 below), and the least significant bit is illustrated as bit 0. Short vertical lines within the four bytes delimit each bit, and the long vertical lines delimit a bit but also delimit a field (both in Fig. 2 and in Fig. 3).

20 Unlike the 32 bit and 16 bit code segment descriptors illustrated in Fig. 3 below, code segment descriptor 40 does not include a base address or limit. Processor 10 employs a flat virtual address space for 32/64 mode (rather than the segmented linear address space employed in 32 bit and 16 bit modes). Accordingly, the portions of code segment descriptor 40 which would otherwise store the base address and limit are
25 reserved in segment descriptor 40. It is noted that a virtual address provided through segmentation may also be referred to herein as a "linear address". The term "virtual address" encompasses any address which is translated through a translation mechanism to a physical address actually used to address memory, including linear addresses and other virtual addresses generated in non-segmented architectures.

Segment descriptor 40 includes a D bit 42, an L bit 44 (set to one for a 32/64 mode code segment), an available bit (AVL) 46, a present (P) bit 48, a descriptor privilege level (DPL) 50, and a type field 52. D bit 42 and L bit 44 are used to determine the operating mode of processor 10, as illustrated in Fig. 5 below. AVL bit 46 is available for use by system software (e.g. the operating system). P bit 48 is used to indicate whether or not the segment is present in memory. If P bit 48 is set, the segment is present and code may be fetched from the segment. If P bit 48 is clear, the segment is not present and an exception is generated to load the segment into memory (e.g. from disk storage or through a network connection). The DPL indicates the privilege level of the segment. Processor 10 employs four privilege levels (encoded as 0 through 3 in the DPL field, with level 0 being the most privileged level). Certain instructions and processor resources (e.g. configuration and control registers) are only executable or accessible at the more privileged levels, and attempts to execute these instructions or access these resources at the lower privilege levels result in an exception. When information from code segment 40 is loaded into the CS segment register, the DPL becomes the current privilege level (CPL) of processor 10. Type field 52 encodes the type of segment. For code segments, the most significant bit two bits of type field 52 may be set (the most significant bit distinguishing a code or data segment from a system segment, and the second most significant bit distinguishing a code segment from a data segment), and the remaining bits may encode additional segment type information (e.g. execute only, execute and read, or execute and read only, conforming, and whether or not the code segment has been accessed).

It is noted that, while several indications in the code segment descriptor are described as bits, with set and clear values having defined meanings, other embodiments may employ the opposite encodings and may use multiple bits, as desired. Thus, for example, the D bit 42 and the L bit 44 may each be an example of an operating mode indication which may be one or more bits as desired, similar to the discussion of enable

indications above.

Turning now to Fig. 3, a block diagram of one embodiment of a code segment descriptor 54 for 32 and 16 bit compatibility mode is shown. Other embodiments are possible and contemplated. As with the embodiment of Fig. 2, code segment descriptor 54 comprises 8 bytes with the most significant 4 bytes illustrated above the least significant 4 bytes.

Code segment descriptor 54 includes D bit 42, L bit 44, AVL bit 46, P bit 48, DPL 50, and type field 52 similar to the above description of code segment descriptor 40. Additionally, code segment descriptor 54 includes a base address field (reference numerals 56A, 56B, and 56C), a limit field (reference numerals 57A and 57B) and a G bit 58. The base address field stores a base address which is added to the logical fetch address (stored in the LEIP register) to form the linear address of an instruction, which may then optionally be translated to a physical address through a paging translation mechanism. The limit field stores a segment limit which defines the size of the segment. Attempts to access a byte at a logical address greater than the segment limit are disallowed and cause an exception. G bit 58 determines the scaling of the segment limit field. If G bit 58 is set the limit is scaled to 4K byte pages (e.g. 12 least significant zeros are appended to the limit in the limit field). If G bit 58 is clear, the limit is used as is.

It is noted that code segment descriptors for 32 and 16 bit modes when 32/64 mode is not enabled via the LME bit in control register 26 may be similar to code segment descriptor 54, except the L bit is reserved and defined to be zero. It is further noted that, in 32 and 16 bit modes (both compatibility mode with the LME bit set and modes with the LME bit clear) according to one embodiment, data segments are used as well. Data segment descriptors may be similar to code segment descriptor 54, except that the D bit 42 is defined to indicate the upper bound of the segment or to define the default stack size (for stack segments).

Turning next to Fig. 4, a diagram illustrating exemplary uses of the LME bit in control register 26 and the compatibility modes to allow for a high degree of flexibility in implementing the 32/64 mode and the 32 and 16 bit modes is shown. A box 60 illustrates
5 exemplary operation when the LME bit is set, and a box 62 illustrates exemplary operation when the LME bit is clear.

As illustrated in box 60, the compatibility modes supported when the LME bit is set may allow for a 64 bit operating system (i.e. an operating system designed to take
10 advantage of the virtual and physical address spaces in excess of 32 bits and/or data operands of 64 bits) to operate with a 32 bit application program (i.e. an application program written using 32 bit operand and address sizes). The code segment for the operating system may be defined by the 32/64 mode code segment descriptor 40 illustrated in Fig. 2, and thus the L bit may be set. Accordingly, the operating system
15 may take advantage of the expanded virtual address space and physical address space for the operating system code and the data structures maintained by the operating system (including, e.g. the segment descriptor tables and the paging translation tables). The operating system may also use the 64 bit data type defined in 32/64 mode using instruction encodings which override the default 32 bit operand size. Furthermore, the
20 operating system may launch a 32 bit application program by establishing one or more 32 bit compatibility mode segment descriptors (L bit cleared, D bit set, e.g. segment descriptor 54 shown in Fig. 2) in the segment descriptor table and branching into one of the compatibility mode segments. Similarly, the operating system may launch a 16 bit application program by establishing one or more 16 bit compatibility mode segment
25 descriptors (L bit cleared, D bit cleared, e.g. segment descriptor 54 shown in Fig. 2) in the segment descriptor table and branching into one of the compatibility mode segments. Accordingly, a 64 bit operating system may retain the ability to execute existing 32 bit and 16 bit application programs in the compatibility mode. A particular application program may be ported to 32/64 mode if the expanded capabilities are desired for that

program, or may remain 32 bit or 16 bit.

While processor 10 is executing the 32 bit application program, the operating mode of processor 10 is 32 bit. Thus, the application program may generally execute in the same fashion as it does in 32 bit mode with the LME bit clear (e.g. when the operating system is a 32 bit operating system as well). However, the application program may call an operating system service, experience an exception, or terminate. In each of these cases, processor 10 may return to executing operating system code (as illustrated by arrow 64 in Fig. 4). Since the operating system code operates in 32/64 mode, the address of the operating system service routine, exception handler, etc. may exceed 32 bits. Thus, processor 10 may need to generate an address greater than 32 bits prior to returning to the operating system code. The LME bit provides processor 10 with an indication that the operating system may be operating in 32/64 mode even though the current operating mode is 32 bit, and thus processor 10 may provide the larger address space for operating system calls and exceptions.

In one embodiment, exceptions are handled using interrupt segment descriptors stored in an interrupt segment descriptor table. If the LME bit is set, the interrupt segment descriptors may be 16 byte entries which include a 64 bit address of the operating system routine which handles the exception. If the LME bit is clear, the interrupt segment descriptors may be eight byte entries which include a 32 bit address. Accordingly, processor 10 accesses the interrupt descriptor table responsive to the LME indication (i.e. reading a 16 byte entry if the LME bit is set and reading an eight byte entry if the LME bit is clear). Therefore, exceptions may be handled by the 64 bit operating system even though the application program is executing in 32 bit compatibility mode. Furthermore, processor 10 supports a 32 bit (or 16 bit) operating system if the LME bit is clear.

Similarly, the call mechanisms within processor 10 may operate in different

fashions based on the state of the LME bit. Since the operating system typically executes at a higher privilege level than the application program, transfers from the application program to the operating system are carefully controlled to ensure that the application program is only able to execute permitted operating system routines. More generally, changes in privilege level are carefully controlled. In one embodiment, processor 10 may support at least two mechanisms for performing operating system calls. One method may be through a call gate in the segment descriptor tables (described in more detail below). Another method may be the SYSCALL instruction supported by processor 10, which uses a model specific register as the source of the address of the operating system routine. Updating the model specific registers is a privileged operation, and thus only code executing at a higher privilege level (e.g. operating system code) may establish the address in the model specific register used by the SYSCALL instruction. For the SYSCALL method, a second model specific register may be defined to store the most significant 32 bits of the address of the operating system routine. Thus, if the LME bit is set, the address may be read from the two model specific registers. If the LME bit is clear, the address may be read from the model specific register storing the least significant 32 bits. Alternatively, the model specific register used by the SYSCALL instruction may be expanded to 64 bits and the address may be 32 bits (the least significant 32 bits of the model specific register) or 64 bits based on the state of the LME bit.

As illustrated above, having the LME bit set may allow for processor 10 to operate in a system in which the operating system is 64 bit and one or more application programs are not 64 bit (e.g. 32 bit as shown or 16 bit, which operates in a similar fashion to the above description). Additionally, as illustrated by box 62, having the LME bit clear may allow for processor 10 to operate in 32 bit or 16 bit modes compatible with the x86 architecture. As described above, the mechanisms for handling exceptions and operating system calls are designed to handle the LME bit being set or clear, and thus the 32 bit and 16 bit modes may operate unmodified, even though processor 10 is capable of

operating in 32/64 mode. Furthermore, by providing the x86 compatible 16 and 32 bit modes when the LME bit is clear, (and ignoring the L bit, which is reserved in these modes) processor 10 may operate in a system in which the L bit is defined for some other purpose than for 32/64 mode and may still support 32/64 mode if the LME bit is set.

- 5 Accordingly, a system employing a 32 bit operating system and 32 bit or 16 bit application programs may employ processor 10. Subsequently, the system could be upgraded to a 64 bit operating system without having to change processor 10.

- 10 Not illustrated in Fig. 4 is a 64 bit operating system and a 64 bit application program operating with the LME bit set. The mechanisms for calling operating system routines described above for the 64 bit operating system and 32 bit application program may apply equally to the 64 bit application program as well. Additionally, call gates which support 64 bits of offset are supported (as will be described in more detail below).

- 15 Turning next to Fig. 5, a table 70 is shown illustrating the states of the LME bit, the L bit in the code segment descriptor, and the D bit in the code segment descriptor and the corresponding operating mode of processor 10 according to one embodiment of processor 10. Other embodiments are possible and contemplated. As table 70 illustrates, if the LME bit is clear, then the L bit is reserved (and defined to be zero). However,
- 20 processor 10 may treat the L bit as a don't care if the LME bit is clear. Thus, the x86 compatible 16 bit and 32 bit modes may be provided by processor 10 if the LME bit is clear. If the LME bit is set and the L bit in the code segment is clear, then a compatibility operating mode is established by processor 10 and the D bit selects 16 bit or 32 bit mode. If the LME bit and the L bit are set and the D bit is clear, 32/64 mode is
- 25 selected for processor 10. Finally, the mode which would be selected if the LME, L and D bits are all set is reserved.

As mentioned above and illustrated in Fig. 6 below, the 32/64 operating mode includes a default address size in excess of 32 bits (implementation dependent but up to

64 bits) and a default operand size of 32 bits. The default operand size of 32 bits may be overridden to 64 bits via a particular instruction's encoding. The default operand size of 32 bits is selected to minimize average instruction length (since overriding to 64 bits involves including an instruction prefix in the instruction encoding which may increase the instruction length) for programs in which 32 bits are sufficient for many of the data manipulations performed by the program. For such programs (which may be a substantial number of the programs currently in existence), moving to a 64 bit operand size may actually reduce the execution performance achieved by the program (i.e. increased execution time). In part, this reduction may be attributable to the doubling in size in memory of the data structures used by the program when 64 bit values are stored. If 32 bits is sufficient, these data structures would store 32 bit values, Thus, the number of bytes accessed when the data structure is accessed increases if 64 bit values are used where 32 bit values would be sufficient, and the increased memory bandwidth (and increased cache space occupied by each value) may cause increased execution time. Accordingly, 32 bits is selected as the default operand size and the default may be overridden via the encoding of a particular instruction.

Turning next to Fig. 6, a table 72 is shown illustrating one embodiment of the use of instruction prefixes to override the operating mode for a particular instruction. Other embodiments are possible and contemplated. Execution core 14 determines the address size and operand size for a particular instruction according to table 72. In particular for the embodiment illustrated in Fig. 6, an instruction prefix byte (the address size override prefix byte) may be used to override the default address size and another instruction prefix byte (the operand size override prefix byte) may be used to override the default operand size. The address size override prefix byte is encoded as 67 (in hexadecimal) and the operand size override prefix byte is encoded as 66 (in hexadecimal). The number of override prefixes in the particular instruction forms the columns of the table. The rows of the table indicate the operand size and address size of the particular instruction, based on the operating mode and the number of override prefixes in the corresponding column.

The number of override prefixes refers to the number of override prefixes of the corresponding type (e.g. address size rows are the address size based on the number of address size override prefixes and operand size rows are the operand size based on the number of operand size override prefixes).

5

The column labeled "0" for the number of override prefixes illustrates the default operand size and address size for each operating mode. It is noted that the 32 bit and 16 bit mode rows refer to both the compatibility modes (LME set) and the standard modes (LME clear). Furthermore, while the default address size is 64 bits in 32/64 mode, the
10 actual number of address bits may be implementation dependent, as discussed above.

The inclusion of one address size override prefix in 32/64 bit mode changes the address size from 64 bit (which may be less than 64 bits for a given implementation but is greater than 32 bits) to 32 bit, as shown in table 72. Additionally, the inclusion of one
15 operand size override prefix in 32/64 bit mode changes the operand size from 32 bit to 64 bit. It may be desirable to provide for a 16 bit operand as well (e.g. to support the short integer data type in the "C" programming language). Accordingly, the inclusion of two operand size override prefixes in 32/64 mode selects an operand size of 16 bits. The inclusion of more than two operand size override prefixes results in the same operand size
20 as the inclusion of two operand size override prefixes. Similarly, the inclusion of more than one address size override prefix results in the same address size as the inclusion of one address size override prefix.

For the 32 bit modes, the inclusion of one override prefix toggles the default 32
25 bit size to 16 bit, and the inclusion of more than one override prefix has the same effect as the inclusion of one override prefix. Similarly, for 16 bit modes, the inclusion of one override prefix toggles the default 16 bit size to 32 bit, and the inclusion of more than one override prefix has the same effect as the inclusion of one override prefix.

Turning now to Fig. 7, a diagram illustrating one embodiment of the LEAX register 74 is shown. Other registers within register file 22 may be similar. Other embodiments are possible and contemplated. In the embodiment of Fig. 7, register 74 includes 64 bits, with the most significant bit labeled as bit 63 and the least significant bit labeled as bit 0. Fig. 7 illustrates the portions of the LEAX register accessed based upon the operand size of an instruction (if the A register is selected as an operand). More particularly, the entirety of register 74 is accessed if the operand size is 64 bits (as illustrated by the brace labeled "LEAX" in Fig. 7). If the operand size is 32 bits, bits 31:0 of register 74 are accessed (as illustrated by the brace labeled "EAX" in Fig. 7). If the operand size is 16 bits, bits 16:0 of the register are accessed (as illustrated by the brace labeled "AX" in Fig. 7). The above operand sizes may be selected based on the operating mode and the inclusion of any override prefixes. However, certain instruction opcodes are defined which access an eight bit register (AH or AL in Fig. 7).

Turning next to Fig. 8, a block diagram is shown illustrating one embodiment of a global descriptor table 80 and a local descriptor table 82. Other embodiments are possible and contemplated. As illustrated in Fig. 8 and mentioned above, the base address of global descriptor table 80 is provided by GDTR 32 and the base address of local descriptor table 82 is provided by LDTR 30. Accordingly, to support placing global descriptor table 80 and local descriptor table 82 arbitrarily within the virtual address space, GDTR 32 and LDTR 30 may store 64 bit base addresses. If the LME bit is clear, the least significant 32 bits of the base address may be used to locate the descriptor tables.

Both global descriptor table 80 and local descriptor table 82 are configured to store segment descriptors of various types. For example, 32/64 mode code segment descriptors 84, 86, and 90 and compatibility mode descriptors 92 and 94 are illustrated in Fig. 8. Each of descriptors 84-94 occupies an entry in the corresponding descriptor table, where an entry is capable of storing one segment descriptor (e.g. 8 bytes for the embodiments illustrated in Figs. 2 and 3). Another type of descriptor in global descriptor

table 80 is a local descriptor table descriptor 96, which defines a system segment for the local descriptor table 82 and provides the base address stored in LDTR 30. LDTR 30 is initialized using an LLDT instruction having as an operand a segment selector locating descriptor 96 in global descriptor table 80. Global descriptor table 80 may store multiple LDT descriptors locating different local descriptor tables, if desired. Since the LDT descriptor 96 may store a 64 bit offset if the LME bit is set, LDT descriptor 96 may occupy two entries in global descriptor table 80. If the LME bit is clear, LDT descriptor 96 may occupy a single entry in global descriptor table 80. Similarly, each task may have a task state segment (TSS) descriptor in one of descriptor tables 80 and 82 to store certain information related to the task. Accordingly, a TSS descriptor may occupy two entries to allow for TSS information to be stored anywhere in the 64 bit address space.

The local and global descriptor tables may also store a call gate descriptor. For example, Fig. 8 illustrates call gate descriptors 100, 102, and 104. Call gate descriptors support a 64 bit offset as well, and thus may occupy two entries in the corresponding descriptor table as well. An exemplary 32/64 call gate descriptor is illustrated in Fig. 9 below.

By maintaining the segment descriptor tables 80 and 82 at 8 bytes and using two entries for descriptors which include 64 bit offsets, descriptors for 16 and 32 bit modes may be stored in the same tables as the descriptors which include 64 bit offsets. Thus, applications operating in compatibility modes may have appropriate descriptors in the same segment descriptor tables as the 64 bit operating systems.

Generally, call gates are used to manage the transition between a code segment having a lesser privilege level and a code segment have a greater privilege level (e.g. an application program calling an operating system routine). The lesser privileged code includes a call or other branch instruction specifying, as a target, a segment selector (and an offset into the segment, which is ignored in this case). The segment selector identifies

a call gate descriptor within the descriptor tables, which includes a minimum privilege level required to execute the greater privilege level code. When processor 10 executes the call or other branch instruction, processor 10 indexes the descriptor tables with the segment selector and locates the call gate. If the current privilege level of processor 10 and the requestor privilege level (which is part of the segment selector, and may be used to lower the current privilege level for privilege checking purposes) both reflect sufficient privilege (e.g. the privilege levels are numerically less than or equal to the minimum privilege level in the call gate descriptor), then the call may proceed. The call gate descriptor includes a segment selector for the target segment (the code segment having the greater privilege level) and the offset within the target segment at which code fetching is to begin. Processor 10 extracts the segment selector and the offset from the call gate descriptor and reads the target segment descriptor to begin fetching the code having the greater privilege level. On the other hand, if either the current privilege level or the requestor privilege level is a lesser privilege level than the minimum privilege level in the call gate descriptor (e.g. either the current or requestor privilege level is numerically greater than the minimum privilege level), processor 10 signals an exception after accessing the call gate descriptor and without accessing the target descriptor. Thus, access to code executing at greater privilege levels is carefully controlled.

As mentioned above, the call gate descriptor includes a target segment selector and offset within the segment. The reference to the target segment descriptor is illustrated in Fig. 8 as an arrow from a call gate descriptor to another descriptor. For example, call gate descriptor 100 references mode descriptor 90; call gate descriptor 102 references 32/64 mode descriptor 86, and call gate descriptor 104 references 32/64 mode descriptor 84. As Fig. 8 illustrates, a call gate descriptor may be stored in either descriptor table and may reference a descriptor in the other table or in the same table. Furthermore, a call gate descriptor may reference either a 32/64 mode descriptor or a compatibility mode descriptor.

Generally, when processor 10 reads a descriptor from one of the descriptor tables using a segment selector, one descriptor table entry is read. However, if the LME bit is set and processor 10 detects that the entry is a call gate descriptor, an LDT descriptor, or a TSS descriptor, processor 10 reads the next succeeding entry in the table to obtain the remainder of the descriptor. Accordingly, call gate descriptors, LDT descriptors, and TSS descriptors may coexist in a table with compatibility mode descriptors (or standard mode descriptors) which are of a different size, without redefining the size of the table entries nor how the table is managed for descriptors which occupy one entry.

Furthermore, since the second portion of the call gate descriptor, the LDT descriptor, and the TSS descriptor may be accessed as a segment descriptor, the portion of the descriptor which would be the type field of a descriptor in the second portion is set to an invalid type when the descriptor is stored into the descriptor table, as shown below in Fig. 9.

Alternatively, processor 10 may read two consecutive entries from a descriptor table each time a descriptor table read is performed, and the second entry may be used if the first entry is a call gate, LDT descriptor type, or TSS descriptor type.

It is noted that code operating in any operating mode (32/64 mode, 32 bit compatibility mode, or 16 bit compatibility mode) may reference a call gate descriptor when the LME bit is set. Thus, a 32 or 16 bit application may call an operating system routine even if the address of the routine is outside the 32 bit or 16 bit address space using the call gate mechanism. Additionally, a call gate descriptor may reference a code segment having any operating mode. The operating system may ensure that the most significant 32 bits of the offset in the call gate are zero (for a 32 bit target segment) or the most significant 48 bits of the offset in the call gate are zero (for a 16 bit target segment).

Turning now to Fig. 9, a block diagram of one embodiment of a call gate descriptor 120 is shown. Other embodiments are possible and contemplated. Similar to Figs. 2 and 3, the most significant bytes are illustrated above the least significant bytes. The most significant bit of each group of four bytes is illustrated as bit 31 and the least

significant bit is illustrated as bit 0. Short vertical lines within the four bytes delimit each bit, and the long vertical lines delimit a bit but also delimit a field. As mentioned above, a call gate descriptor occupies two entries in a descriptor table. The horizontal dashed line in Fig. 9 divides call gate descriptor 120 into an upper portion (above the line) and a lower portion (below the line). The lower portion is stored in the entry indexed by the call gate's segment selector, and the upper portion is stored in the next succeeding entry.

Call gate descriptor 120 includes a target segment selector (field 122), an offset (fields 124A, 124B, and 124C), a present (P) bit 126, a descriptor privilege level (DPL) 128, a type field 130, and a pseudo-type field 132. The P bit is similar to P bit 48 described above. The target segment selector identifies an entry within one of the descriptor tables at which the target segment descriptor (having the greater privilege level) is stored. The offset identifies the address at which code fetching is to begin. In 32/64 mode, since the code segment has no base address and flat linear addressing is used, the offset is the address at which code fetching begins. In other modes, the offset is added to the segment base defined by the target segment descriptor to generate the address at which code fetching begins. As mentioned above, the offset may comprise 64 bits in the present embodiment.

DPL 128 stores the minimum privilege level of the calling routine must have (both in the current privilege level and the requested privilege level) which may successfully pass through the call gate and execute the called routine at the privilege level specified in the target segment descriptor.

Type field 130 is coded to a call gate descriptor type. In one embodiment, this type is coded as the 32 bit call gate type defined in the x86 architecture. Alternatively, other encodings may be used. Finally, pseudo-type field 132 is coded to an invalid type (e.g. zero) to ensure that if a segment selector identifying the segment table entry storing the upper half of call gate descriptor 120 is presented, then an exception will be signalled

by processor 10.

It is noted that the lower half of LDT descriptor 96 may be similar to the 32 bit LDT descriptor and the upper half of LDT descriptor 96 may be similar to the upper half of call gate descriptor 120.

Turning next to Fig. 10, a block diagram of an instruction format 140 for instructions executed by processor 10 is shown. Other embodiments are possible and contemplated. In the embodiment of Fig. 10, instruction format 140 includes a prefix field 142, an opcode field 144, a mod R/M (register/memory) field 146, an SIB (scale index base) field 148, a displacement field 150, and an immediate field 152. Each of the fields except for the opcode field 144 are optional. Thus, instruction format 140 may define a variable length instruction.

Prefix field 142 is used for any instruction prefixes for the instruction. As described above, an operand size override prefix and an address size override prefix may be encoded into an instruction to override the operating mode of processor 10. These override prefixes are included in prefix field 142. As noted above, the operand size override prefix and address size override prefix may each be bytes included within prefix field 142.

Opcode field 144 includes the opcode of the instruction (i.e. which instruction in the instruction set is being executed). For some instructions, operands may be specified within opcode field 144. For other instructions, a portion of the opcode may be included within mod R/M field 146. Furthermore, certain opcodes specify an eight bit or 16 bit register as an operand. Thus opcode encodings may serve to override the defaults indicated by the operating mode of processor 10 as well.

Mod R/M field 146 and SIB field 148 indicate operands of the instruction.

Displacement field 150 includes any displacement information, and immediate field 152 includes an immediate operand.

Computer Systems

5 Turning now to Fig. 11, a block diagram of one embodiment of a computer system 200 including processor 10 coupled to a variety of system components through a bus bridge 202 is shown. Other embodiments are possible and contemplated. In the depicted system, a main memory 204 is coupled to bus bridge 202 through a memory bus 206, and a graphics controller 208 is coupled to bus bridge 202 through an AGP bus 210.
10 Finally, a plurality of PCI devices 212A-212B are coupled to bus bridge 202 through a PCI bus 214. A secondary bus bridge 216 may further be provided to accommodate an electrical interface to one or more EISA or ISA devices 218 through an EISA/ISA bus 220. Processor 10 is coupled to bus bridge 202 through a CPU bus 224 and to an optional L2 cache 228. Together, CPU bus 224 and the interface to L2 cache 228 may
15 comprise an external interface to which external interface unit 18 may couple.

Bus bridge 202 provides an interface between processor 10, main memory 204, graphics controller 208, and devices attached to PCI bus 214. When an operation is received from one of the devices connected to bus bridge 202, bus bridge 202 identifies
20 the target of the operation (e.g. a particular device or, in the case of PCI bus 214, that the target is on PCI bus 214). Bus bridge 202 routes the operation to the targeted device. Bus bridge 202 generally translates an operation from the protocol used by the source device or bus to the protocol used by the target device or bus.

25 In addition to providing an interface to an ISA/EISA bus for PCI bus 214, secondary bus bridge 216 may further incorporate additional functionality, as desired. An input/output controller (not shown), either external from or integrated with secondary bus bridge 216, may also be included within computer system 200 to provide operational support for a keyboard and mouse 222 and for various serial and parallel ports, as desired.

An external cache unit (not shown) may further be coupled to CPU bus 224 between processor 10 and bus bridge 202 in other embodiments. Alternatively, the external cache may be coupled to bus bridge 202 and cache control logic for the external cache may be integrated into bus bridge 202. L2 cache 228 is further shown in a backside configuration to processor 10. It is noted that L2 cache 228 may be separate from processor 10, integrated into a cartridge (e.g. slot 1 or slot A) with processor 10, or even integrated onto a semiconductor substrate with processor 10.

Main memory 204 is a memory in which application programs are stored and from which processor 10 primarily executes. A suitable main memory 204 comprises DRAM (Dynamic Random Access Memory). For example, a plurality of banks of SDRAM (Synchronous DRAM) or Rambus DRAM (RDRAM) may be suitable.

PCI devices 212A-212B are illustrative of a variety of peripheral devices such as, for example, network interface cards, video accelerators, audio cards, hard or floppy disk drives or drive controllers, SCSI (Small Computer Systems Interface) adapters and telephony cards. Similarly, ISA device 218 is illustrative of various types of peripheral devices, such as a modem, a sound card, and a variety of data acquisition cards such as GPIB or field bus interface cards.

Graphics controller 208 is provided to control the rendering of text and images on a display 226. Graphics controller 208 may embody a typical graphics accelerator generally known in the art to render three-dimensional data structures which can be effectively shifted into and from main memory 204. Graphics controller 208 may therefore be a master of AGP bus 210 in that it can request and receive access to a target interface within bus bridge 202 to thereby obtain access to main memory 204. A dedicated graphics bus accommodates rapid retrieval of data from main memory 204. For certain operations, graphics controller 208 may further be configured to generate PCI protocol transactions on AGP bus 210. The AGP interface of bus bridge 202 may thus

include functionality to support both AGP protocol transactions as well as PCI protocol target and initiator transactions. Display 226 is any electronic display upon which an image or text can be presented. A suitable display 226 includes a cathode ray tube ("CRT"), a liquid crystal display ("LCD"), etc.

5

It is noted that, while the AGP, PCI, and ISA or EISA buses have been used as examples in the above description, any bus architectures may be substituted as desired. It is further noted that computer system 200 may be a multiprocessing computer system including additional processors (e.g. processor 10a shown as an optional component of computer system 200). Processor 10a may be similar to processor 10. More particularly, processor 10a may be an identical copy of processor 10. Processor 10a may be connected to bus bridge 202 via an independent bus (as shown in Fig. 11) or may share CPU bus 224 with processor 10. Furthermore, processor 10a may be coupled to an optional L2 cache 228a similar to L2 cache 228.

15

Turning now to Fig. 12, another embodiment of a computer system 300 is shown. Other embodiments are possible and contemplated. In the embodiment of Fig. 12, computer system 300 includes several processing nodes 312A, 312B, 312C, and 312D. Each processing node is coupled to a respective memory 314A-314D via a memory controller 316A-316D included within each respective processing node 312A-312D. Additionally, processing nodes 312A-312D include interface logic used to communicate between the processing nodes 312A-312D. For example, processing node 312A includes interface logic 318A for communicating with processing node 312B, interface logic 318B for communicating with processing node 312C, and a third interface logic 318C for communicating with yet another processing node (not shown). Similarly, processing node 312B includes interface logic 318D, 318E, and 318F; processing node 312C includes interface logic 318G, 318H, and 318I; and processing node 312D includes interface logic 318J, 318K, and 318L. Processing node 312D is coupled to communicate with a plurality of input/output devices (e.g. devices 320A-320B in a daisy chain

configuration) via interface logic 318L. Other processing nodes may communicate with other I/O devices in a similar fashion.

Processing nodes 312A-312D implement a packet-based link for inter-processing
5 node communication. In the present embodiment, the link is implemented as sets of
unidirectional lines (e.g. lines 324A are used to transmit packets from processing node
312A to processing node 312B and lines 324B are used to transmit packets from
processing node 312B to processing node 312A). Other sets of lines 324C-324H are used
to transmit packets between other processing nodes as illustrated in Fig. 12. Generally,
10 each set of lines 324 may include one or more data lines, one or more clock lines
corresponding to the data lines, and one or more control lines indicating the type of
packet being conveyed. The link may be operated in a cache coherent fashion for
communication between processing nodes or in a noncoherent fashion for communication
between a processing node and an I/O device (or a bus bridge to an I/O bus of
15 conventional construction such as the PCI bus or ISA bus). Furthermore, the link may be
operated in a non-coherent fashion using a daisy-chain structure between I/O devices as
shown. It is noted that a packet to be transmitted from one processing node to another
may pass through one or more intermediate nodes. For example, a packet transmitted by
processing node 312A to processing node 312D may pass through either processing node
20 312B or processing node 312C as shown in Fig. 12. Any suitable routing algorithm may
be used. Other embodiments of computer system 300 may include more or fewer
processing nodes than the embodiment shown in Fig. 12.

Generally, the packets may be transmitted as one or more bit times on the lines
25 324 between nodes. A bit time may be the rising or falling edge of the clock signal on
the corresponding clock lines. The packets may include command packets for initiating
transactions, probe packets for maintaining cache coherency, and response packets from
responding to probes and commands.

Processing nodes 312A-312D, in addition to a memory controller and interface logic, may include one or more processors. Broadly speaking, a processing node comprises at least one processor and may optionally include a memory controller for communicating with a memory and other logic as desired. More particularly, each
5 processing node 312A-312D may comprise one or more copies of processor 10. External interface unit 18 may include the interface logic 318 within the node, as well as the memory controller 316.

Memories 314A-314D may comprise any suitable memory devices. For example,
10 a memory 314A-314D may comprise one or more RAMBUS DRAMs (RDRAMs), synchronous DRAMs (SDRAMs), static RAM, etc. The address space of computer system 300 is divided among memories 314A-314D. Each processing node 312A-312D may include a memory map used to determine which addresses are mapped to which memories 314A-314D, and hence to which processing node 312A-312D a memory
15 request for a particular address should be routed. In one embodiment, the coherency point for an address within computer system 300 is the memory controller 316A-316D coupled to the memory storing bytes corresponding to the address. In other words, the memory controller 316A-316D is responsible for ensuring that each memory access to the corresponding memory 314A-314D occurs in a cache coherent fashion. Memory
20 controllers 316A-316D may comprise control circuitry for interfacing to memories 314A-314D. Additionally, memory controllers 316A-316D may include request queues for queuing memory requests.

Generally, interface logic 318A-318L may comprise a variety of buffers for
25 receiving packets from the link and for buffering packets to be transmitted upon the link. Computer system 300 may employ any suitable flow control mechanism for transmitting packets. For example, in one embodiment, each interface logic 318 stores a count of the number of each type of buffer within the receiver at the other end of the link to which that interface logic is connected. The interface logic does not transmit a packet unless the

receiving interface logic has a free buffer to store the packet. As a receiving buffer is freed by routing a packet onward, the receiving interface logic transmits a message to the sending interface logic to indicate that the buffer has been freed. Such a mechanism may be referred to as a "coupon-based" system.

5

I/O devices 320A-320B may be any suitable I/O devices. For example, I/O devices 320A-320B may include network interface cards, video accelerators, audio cards, hard or floppy disk drives or drive controllers, SCSI (Small Computer Systems Interface) adapters and telephony cards, modems, sound cards, and a variety of data acquisition
10 cards such as GPIB or field bus interface cards.

Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

1. A processor comprising:

5 a segment register configured to store a segment selector identifying a segment
 descriptor including a first operating mode indication and a second
 operating mode indication;

10 a control register configured to store an enable indication, wherein said processor
 is configured to establish an operating mode responsive to said enable
 indication, said first operating mode indication, and said second operating
 mode indication.

2. The processor as recited in claim 1 wherein said operating mode is a first operating mode if said enable indication is in an enabled state and said first operating mode indication is in a first state, and wherein said operating mode is a second operating mode if said enable indication is in said enabled state, said first operating mode indication is in a second state, and said second operating mode indication is in said first state.

20 3. The processor as recited in claim 2 wherein said second operating mode is one of a plurality of operating modes available if said enable indication is in said enabled state and said first operating mode indication is in said second state, and wherein said one of said plurality of operating modes is selected in response to a state of said second operating mode indication.

25

4. The processor as recited in claim 3 wherein one of said plurality of operating modes is a 32 bit operating mode.

5. The processor as recited in claim 3 wherein one of said plurality of operating modes is

a 16 bit operating mode.

6. The processor as recited in claim 2 wherein said first operating mode includes a default address size which is greater than 32 bits.

5

7. The processor as recited in claim 6 wherein said default address size applies to virtual addresses generated by said processor.

8. The processor as recited in claim 7 wherein a virtual address is generated according to a segmentation mechanism employed by said processor.

10

9. The processor as recited in claim 7 wherein said default address size further applies to physical addresses generated by said processor.

10. The processor as recited in claim 1 wherein, if said enable indication is in a disabled state, said first operating mode indication is undefined and said processor is configured to establish said operating mode responsive to said second operating mode indication.

15

11. A processor comprising:

20

a segment register configured to store a segment selector and information from a segment descriptor, wherein said segment selector includes an index into a segment descriptor table stored in a memory to which said processor is coupled, said segment descriptor stored in said segment descriptor table in an entry indicated by said index, wherein said processor is configured to read said segment descriptor from said segment descriptor table responsive to said segment selector, said segment descriptor including an operating mode indication; and

25

a control register configured to store an enable indication;

wherein said processor is configured to operate in an operating mode in which virtual addresses are greater than 32 bits responsive to said enable indication being in an enabled state and said operating mode indication being in a first state.

12. The processor as recited in claim 11 wherein physical addresses are greater than 32 bit in said operating mode.

13. The processor as recited in claim 12 wherein physical addresses are a first number of bits less than or equal to 64 bits.

14. The processor as recited in claim 11 wherein virtual addresses are a first number of bits less than or equal to 64 bits.

15. The processor as recited in claim 11 wherein said segment descriptor further includes a privilege level.

16. The processor as recited in claim 11 further comprising a second control register configured to store a second enable indication, wherein said processor is configured to read said segment descriptor from said segment descriptor table responsive to said second enable indication being in said enabled state.

17. A method comprising:

establishing an operating mode in a processor in response to an enable indication in a control register within said processor, a first operating mode indication in a segment descriptor, and a second operating mode indication in said segment descriptor;

fetching operands and generating addresses in response to said operating mode.

18. The method as recited in claim 17 wherein said establishing comprises establishing a
5 first operating mode responsive to said enable indication being in an enabled state and
said first operating mode indication being in a first state, and wherein said first operating
mode includes a default address size greater than 32 bits.

19. The method as recited in claim 18 wherein said default address size applies to a
10 virtual address.

20. The method as recited in claim 19 wherein said default address size applies to a
physical address.

21. The method as recited in claim 18 wherein said establishing further comprises
15 establishing a second operating mode responsive to said enable indication being in an
enabled state, said first operating mode indication being in a second state, and said second
operating mode being in said first state, and wherein said first operating mode includes a
default address size of 32 bits.

22. The method as recited in claim 18 wherein said establishing further comprises
20 establishing one of a plurality of operating modes if said enable indication is in said
enabled state and said first operating mode indication is in a second state, and wherein
said one of said plurality of operating modes is selected in response to a state of said
25 second operating mode indication.

ABSTRACT OF THE DISCLOSURE

A processor supports a processing mode in which the address size is greater than
5 32 bits and the operand size may be 32 or 64 bits. The address size may be nominally
indicated as 64 bits, although various embodiments of the processor may implement any
address size which exceeds 32 bits, up to and including 64 bits, in the processing mode.
The processing mode may be established by placing an enable indication in a control
register into an enabled state and by setting a first operating mode indication and a second
10 operating mode indication in a segment descriptor to predefined states. Other
combinations of the first operating mode indication and the second operating mode
indication may be used to provide compatibility modes for 32 bit and 16 bit processing
compatible with the x86 processor architecture (with the enable indication remaining in
the enabled state).

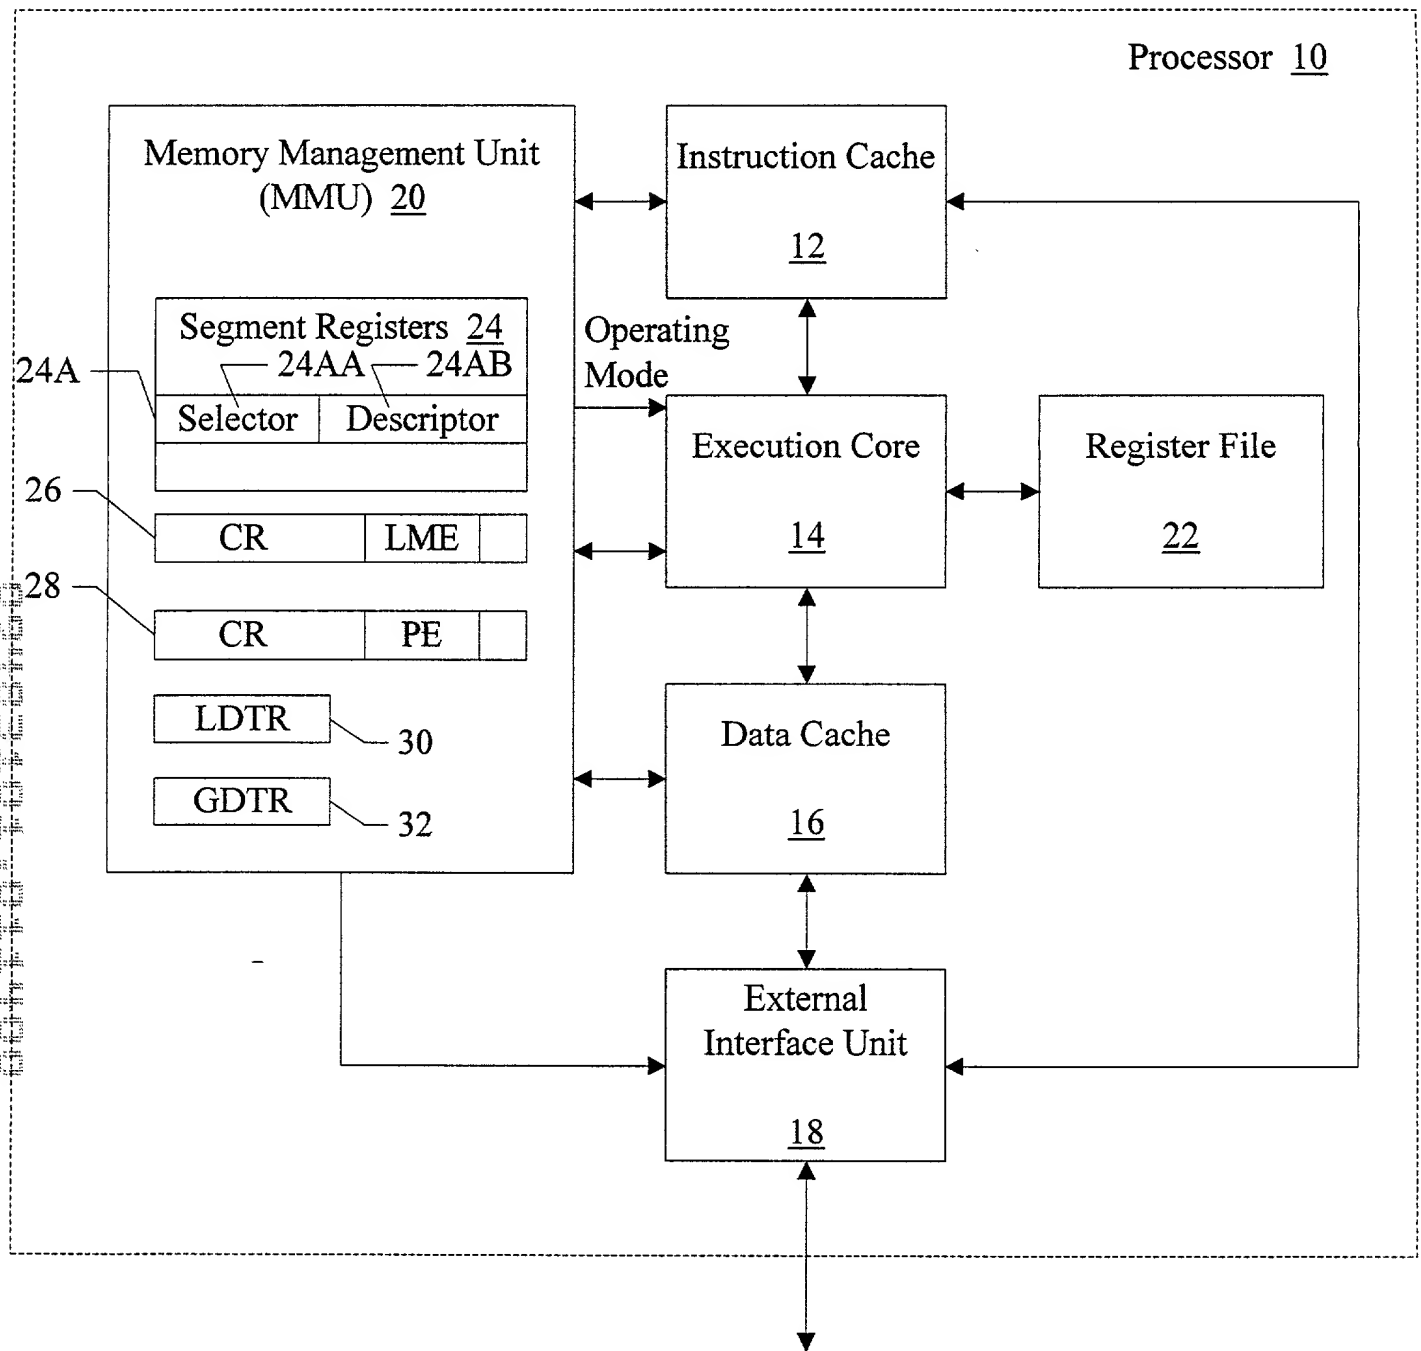


Fig. 1

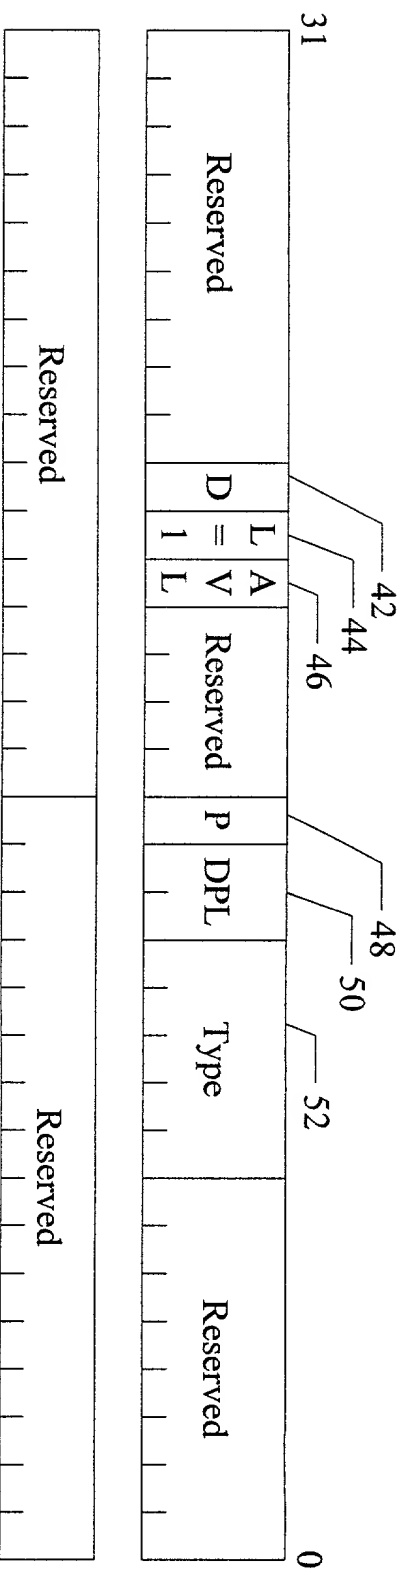


Fig. 2

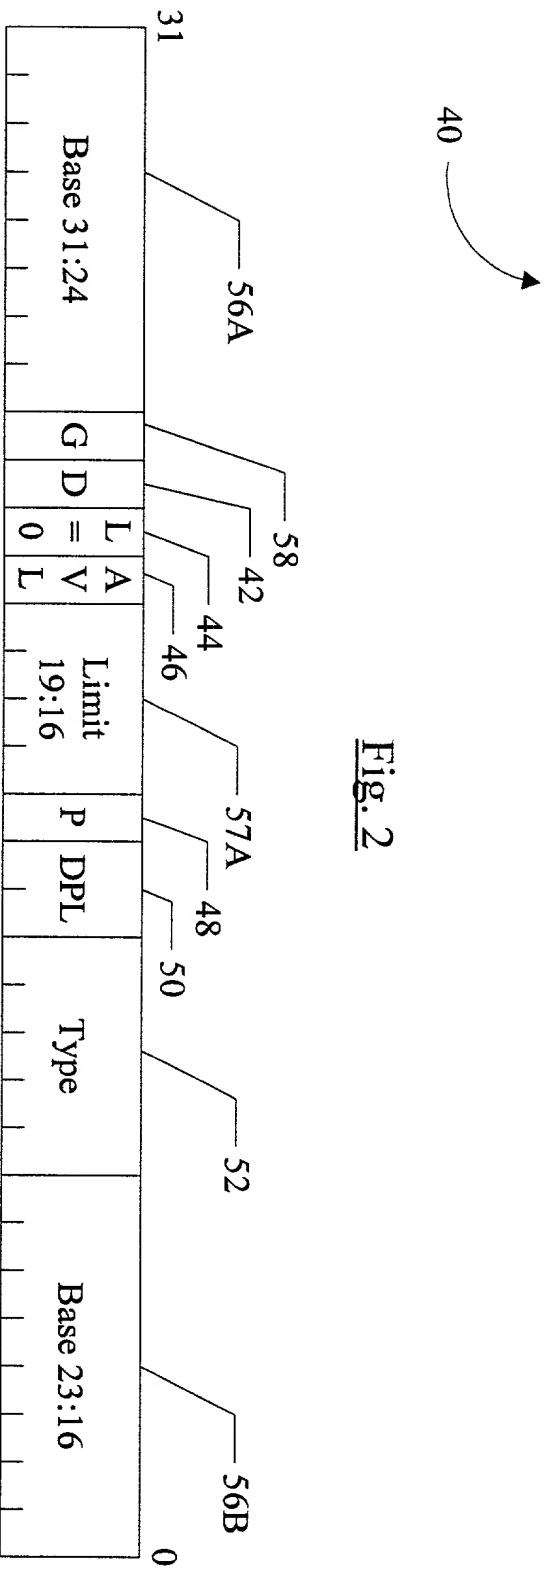
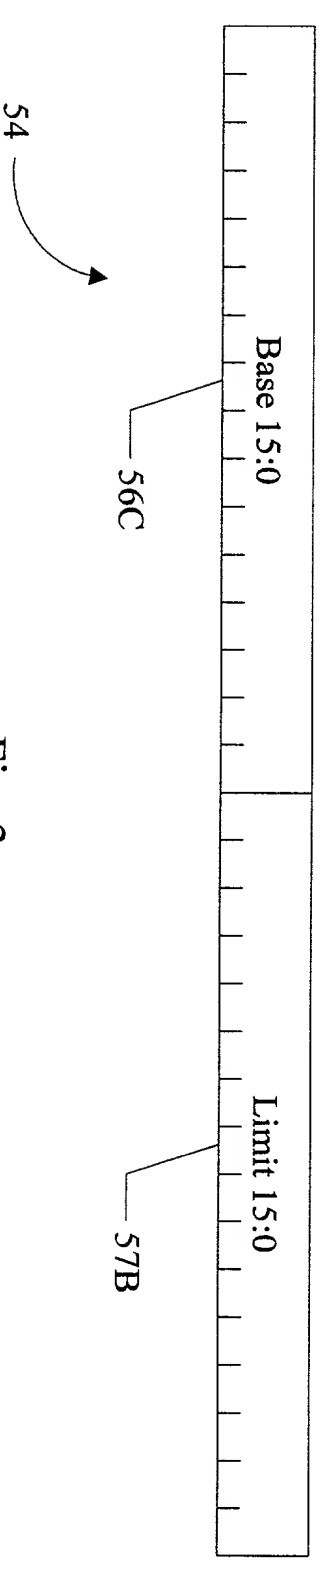


Fig. 3



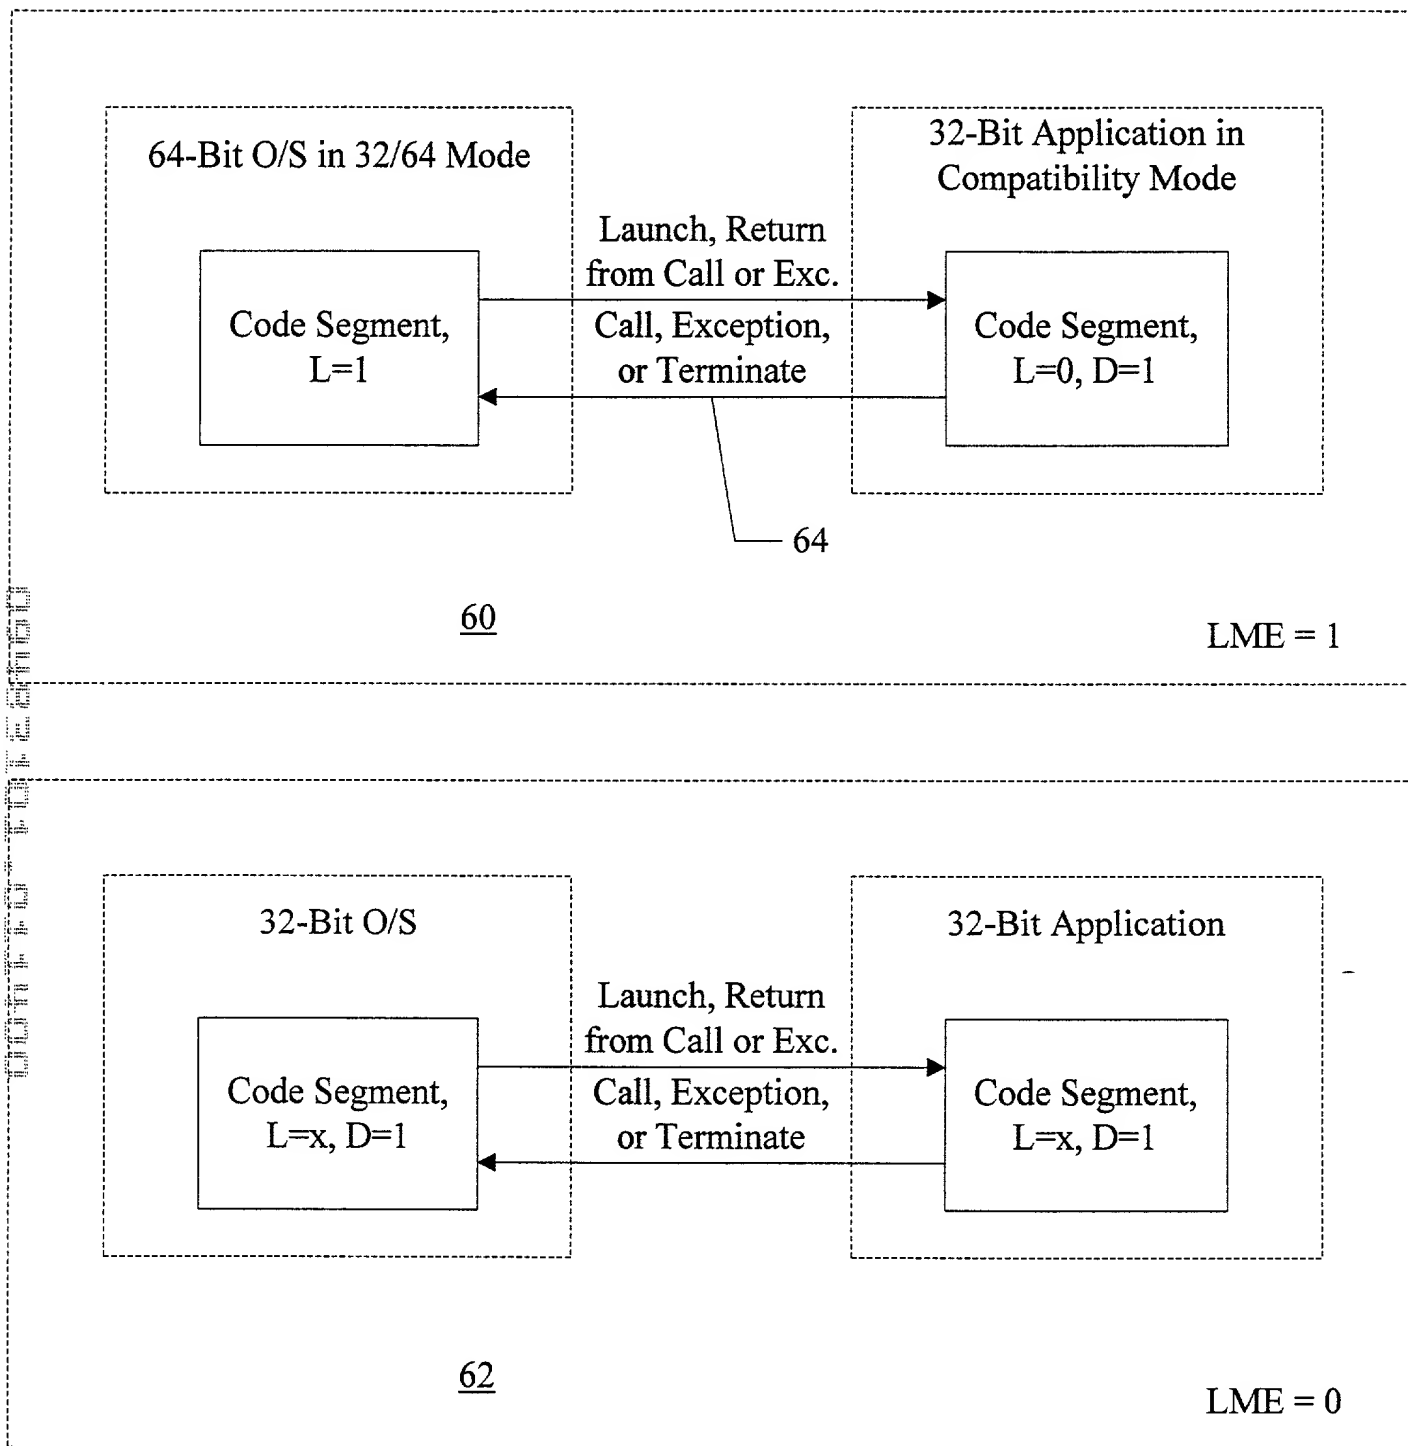


Fig. 4

<u>LME</u>	<u>CS L Bit</u>	<u>CS D Bit</u>	<u>Operating Mode</u>
0	x	0	16 Bit Mode
0	x	1	32 Bit Mode
1	0	0	16 Bit Compatibility Mode
1	0	1	32 Bit Compatibility Mode
1	1	0	32/64 Mode
1	1	1	Reserved


70 ↗

Fig. 5

Number of Override Prefixes (66H Operand, 67H Address)		0	1	2+
32/64 Mode	Operand Size	32 bits	64 bits	16 bits
	Address Size	64 bits	32 bits	32 bits
32 Bit Mode Incl. Compatibility Mode	Operand Size	32 bits	16 bits	16 bits
	Address Size	32 bits	16 bits	16 bits
16 Bit Mode Incl. Compatibility Mode	Operand Size	16 bits	32 bits	32 bits
	Address Size	16 bits	32 bits	32 bits

72 ↗

Fig. 6

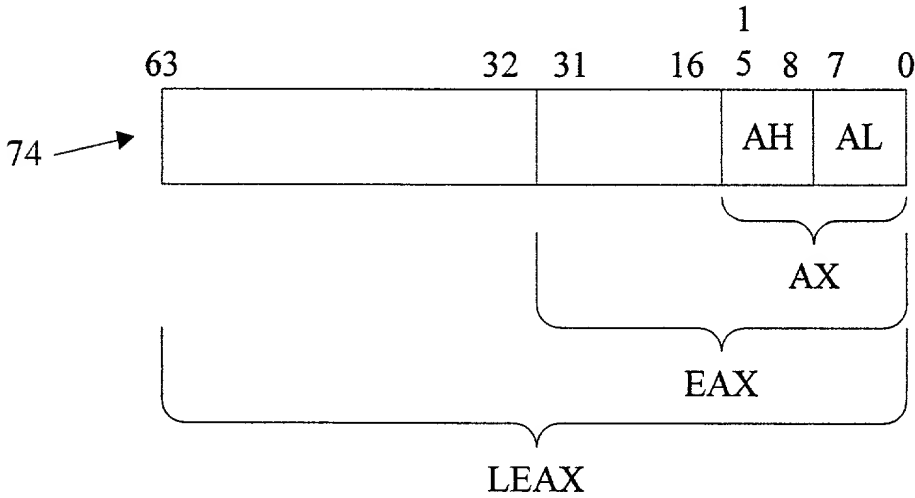

74 →

Fig. 7

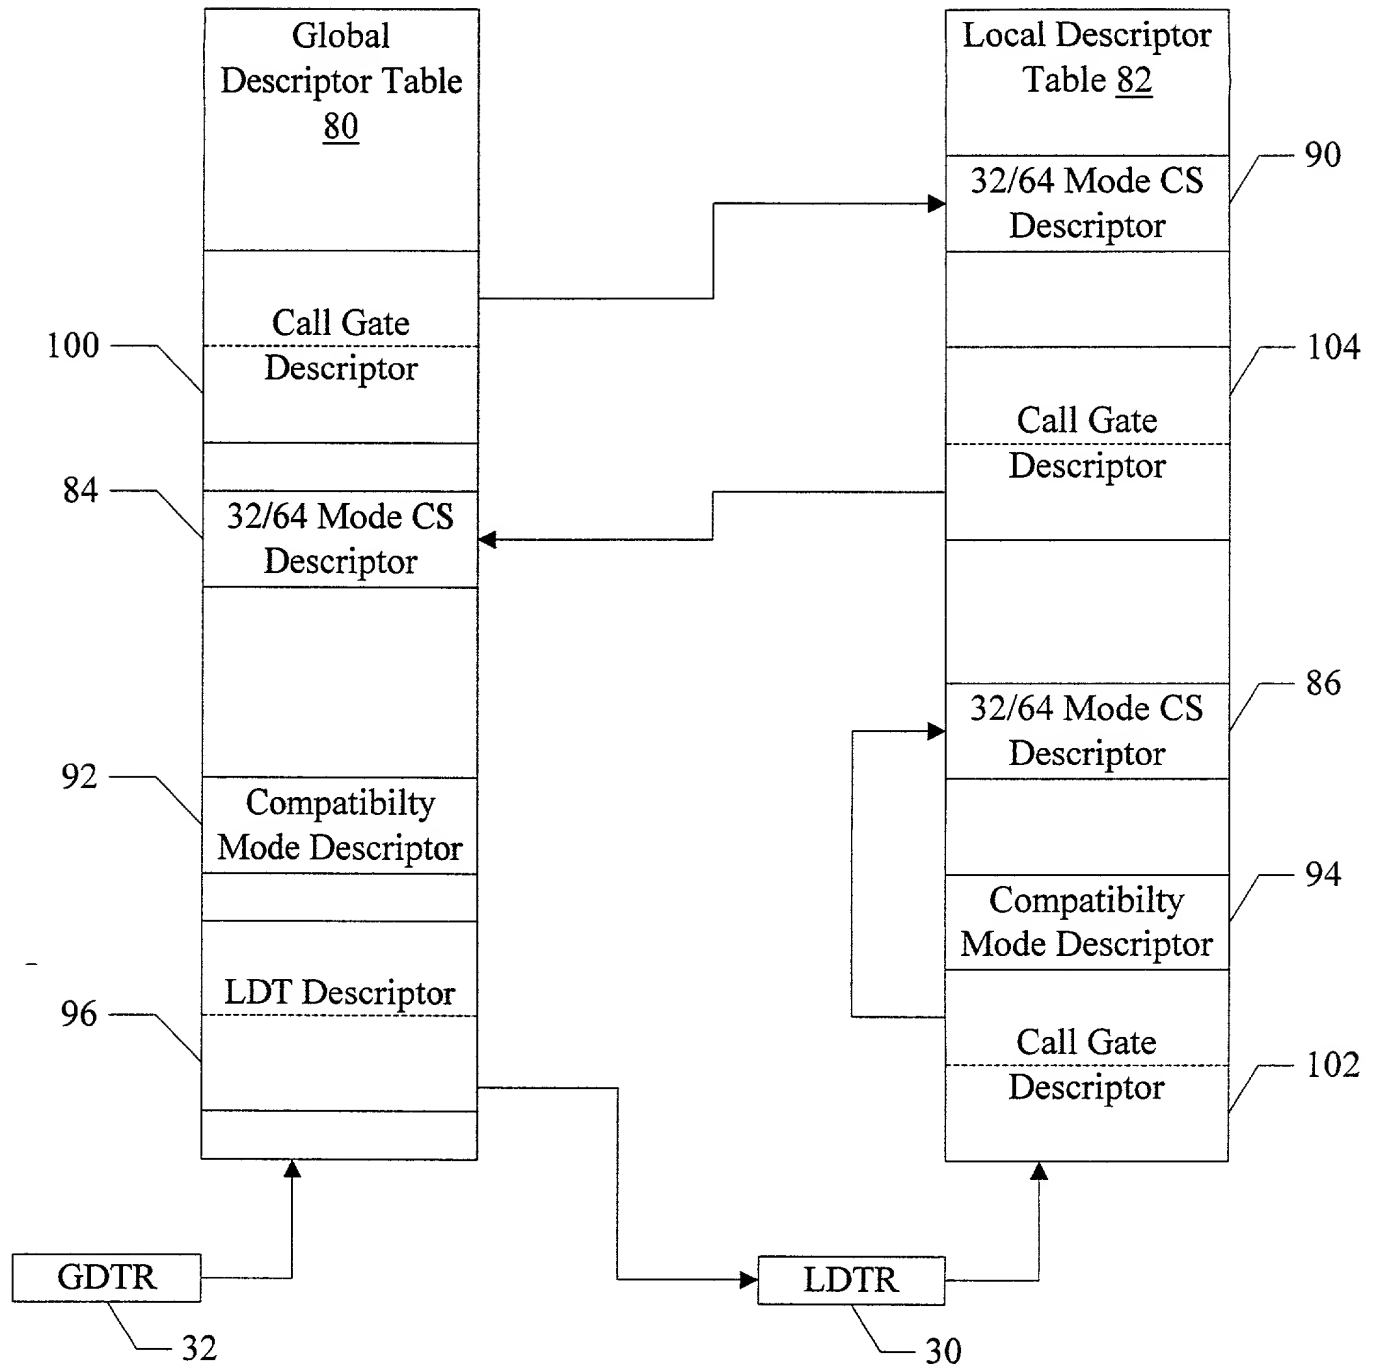


Fig. 8


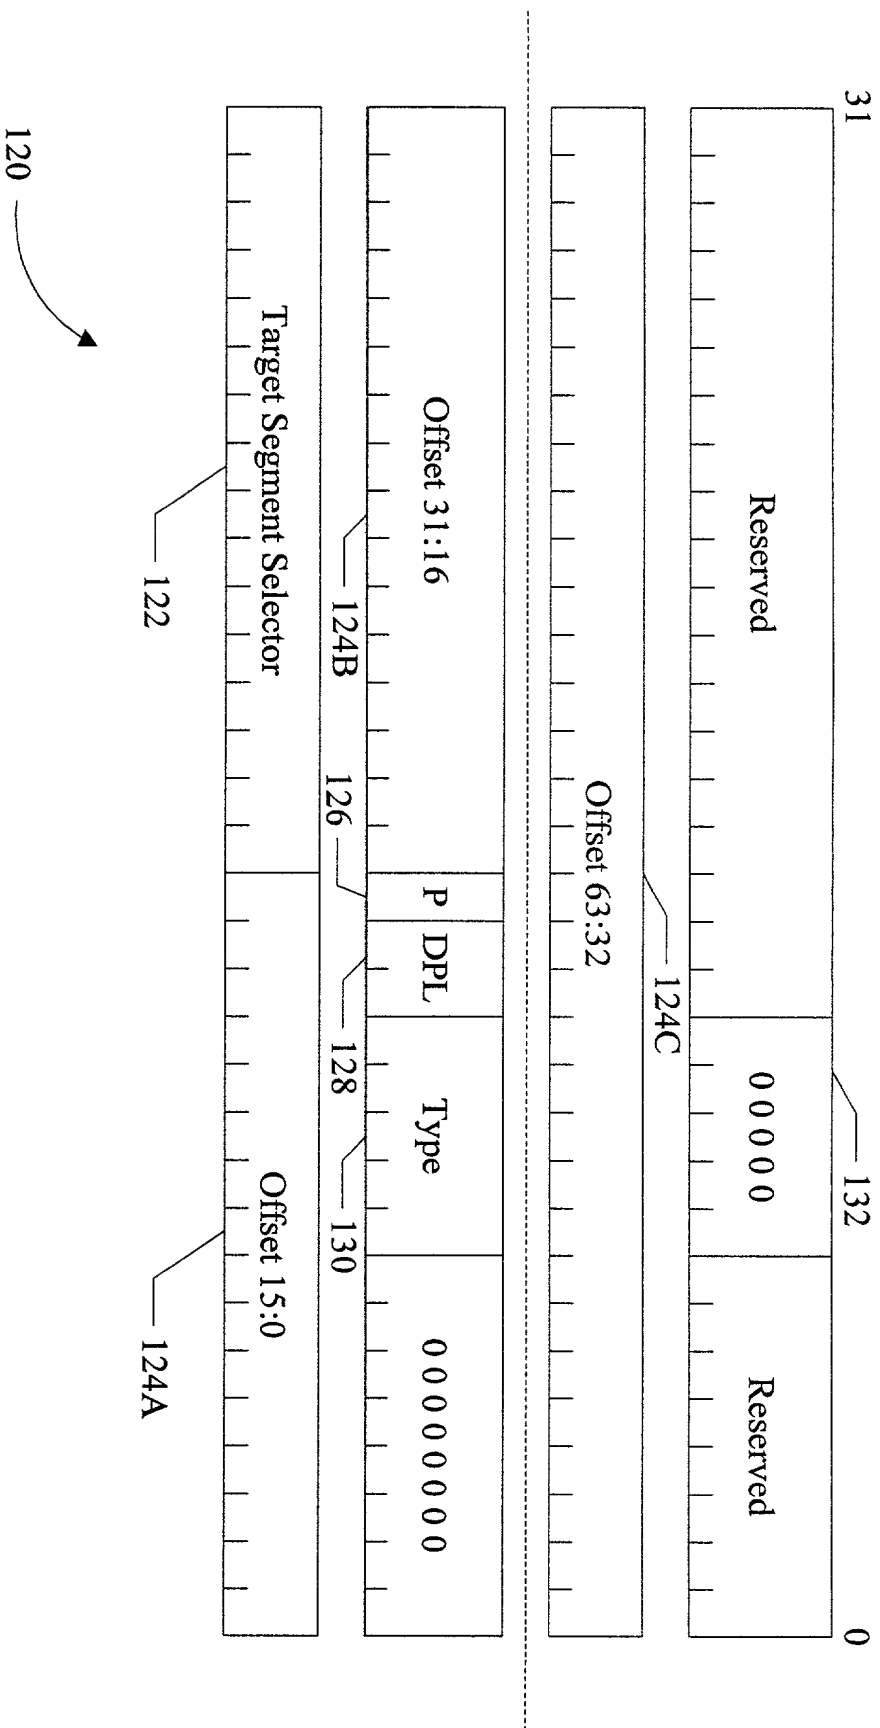


Fig. 9

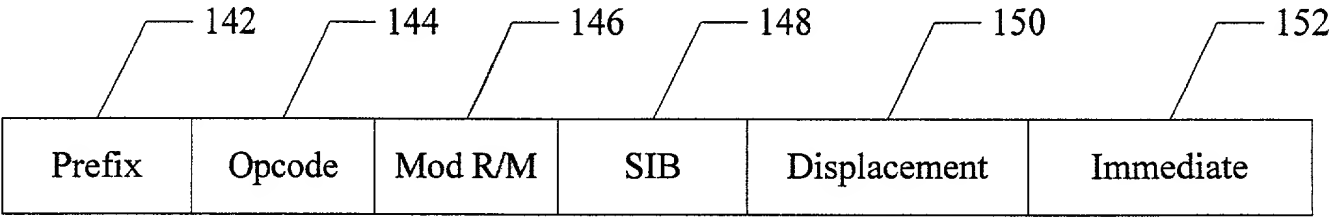

140

A curved arrow originates from the number 140 and points towards the instruction fields shown in the diagram above.

Fig. 10

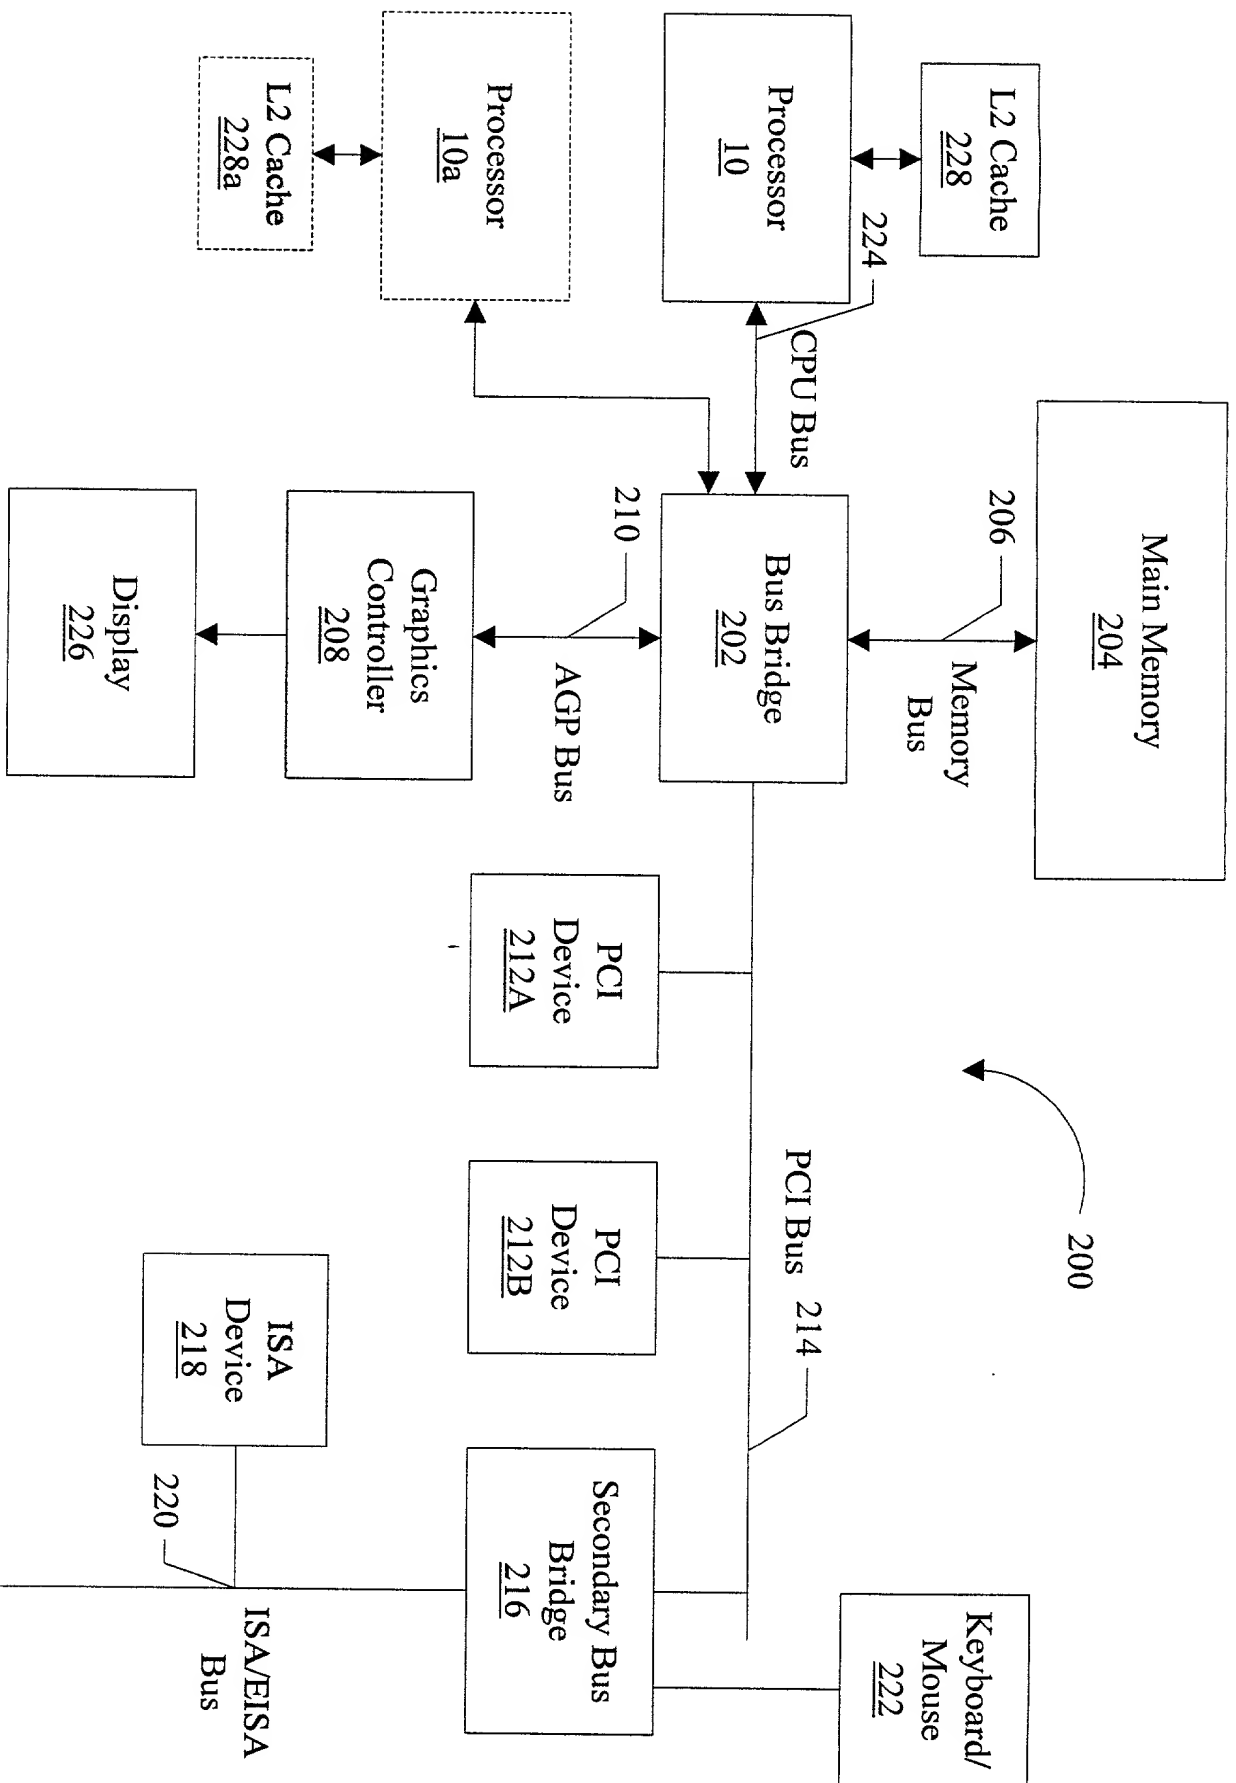


Fig. 11

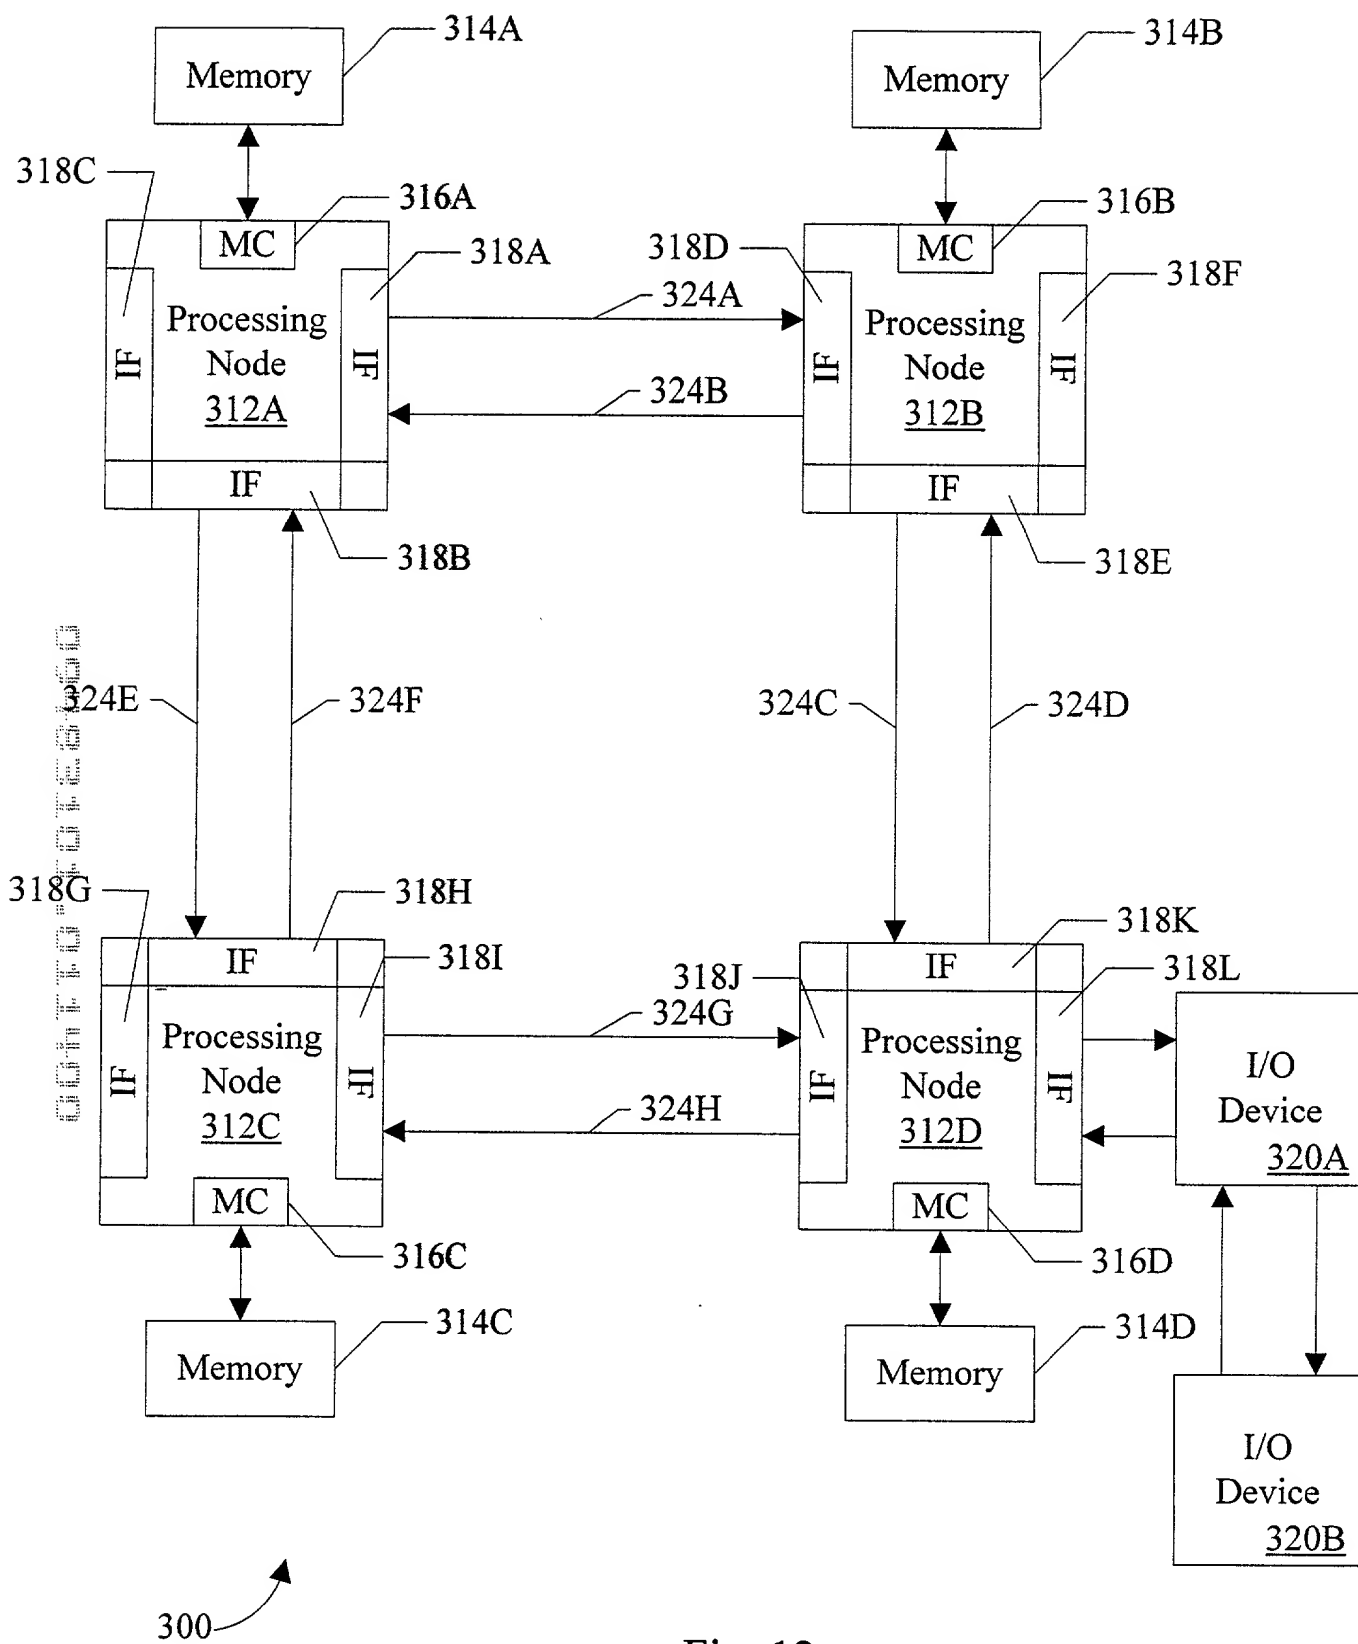


Fig. 12

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"ESTABLISHING AN OPERATING MODE IN A PROCESSOR,"** the specification of which:

☒ is attached hereto.

☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate listed below, or under § 365(a) of any PCT international application listed below designating least one country other than the United States of America, and have identified below any foreign application for patent or inventor's certificate, or of any PCT international application, having a filing date before that of the application on which priority is claimed.

<u>Prior Foreign Application No.</u>	<u>Country</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>	<u>Priority</u> <u>Claimed</u>	<u>Cert. copy</u> <u>Attached</u>
N/A				

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

<u>Provisional Application No.</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>
N/A	

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below, or under § 365(c) of any PCT international application listed below designating the United States of America, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information known to me to be material to the patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Parent Application No.</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>	<u>Parent Patent No. (if applicable) or Status</u>
N/A		

I hereby revoke any previous Powers of Attorney and appoint each of

Elizabeth A. Apperley	Reg. No. 36,428
Paul S. Drake	Reg. No. 33,491
Vincenzo D. Pitruzzella	Reg. No. 28,656
Louis A. Riley	Reg. No. 39,817
Richard J. Roddy	Reg. No. 27,688
William D. Zahrt II	Reg. No. 26,070

each of said attorneys or agents being employed by Advanced Micro Devices, Inc.; and

Mark L. Berrier	Reg. No. 35,066
Dan R. Christen	Reg. No. 39,943
Gentry E. Crook	Reg. No. 44,633
Kevin L. Daffer	Reg. No. 34,146
Mark R. DeLuca	Reg. No. 44,649
Jeffrey C. Hood	Reg. No. 35,198
Robert C. Jahnke	Reg. No. 44,800
B. Noël Kivlin	Reg. No. 33,929
Christopher P. Kosh	Reg. No. 42,760
Robert C. Kowert	Reg. No. 39,255
Lawrence J. Merkel	Reg. No. 41,191
Eric B. Meyertons	Reg. No. 34,876
Louise K. Miller	Reg. No. 36,609
David W. Quimby	Reg. No. 39,338
Eric A. Stephenson	Reg. No. 38,321
Larry D. Thompson	Reg. No. 43,952
David A. Rose	Reg. No. 26,223


each of said attorneys or agents being members or associates of the firm of Conley, Rose & Tayon, P.C., as attorney or agent for so long as they remain with such company or firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive the Letters Patent.

Please direct all communications to:

Lawrence J. Merkel
Conley, Rose & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767-0398
Phone: (512) 476-1400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made herein on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: Kevin J. McGrath

Inventor's Signature:  Date: 12/13/99

City and State (or Foreign Country) of Residence: Los Gatos, CA Citizenship: U.S.A.

Post Office and Residence Address: 22876 Huchinson Rd., Los Gatos, CA 95033
(Include number, street name, city, state and zip code)

Inventor's Full Name: Michael T. Clark

Inventor's Signature: _____ Date: _____

City and State (or Foreign Country) of Residence: Austin, TX Citizenship: U.S.A.

Post Office and Residence Address: 6137 Mordred Ln., Austin, Texas 78739
(Include number, street name, city, state and zip code)

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"ESTABLISHING AN OPERATING MODE IN A PROCESSOR,"** the specification of which:

☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate listed below, or under § 365(a) of any PCT international application listed below designating least one country other than the United States of America, and have identified below any foreign application for patent or inventor's certificate, or of any PCT international application, having a filing date before that of the application on which priority is claimed.

<u>Prior Foreign Application No.</u>	<u>Country</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>	<u>Priority</u> <u>Claimed</u>	<u>Cert. copy</u> <u>Attached</u>
N/A				

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

<u>Provisional Application No.</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>
N/A	

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below, or under § 365(c) of any PCT international application listed below designating the United States of America, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information known to me to be material to the patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Parent Application No.</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>	<u>Parent Patent No. (if applicable) or Status</u>
N/A		

I hereby revoke any previous Powers of Attorney and appoint each of

Elizabeth A. Apperley	Reg. No. 36,428
Paul S. Drake	Reg. No. 33,491
Vincenzo D. Pitruzzella	Reg. No. 28,656
Louis A. Riley	Reg. No. 39,817
Richard J. Roddy	Reg. No. 27,688
William D. Zahrt II	Reg. No. 26,070

each of said attorneys or agents being employed by Advanced Micro Devices, Inc.; and

Mark L. Berrier	Reg. No. 35,066
Dan R. Christen	Reg. No. 39,943
Gentry E. Crook	Reg. No. 44,633
Kevin L. Daffer	Reg. No. 34,146
Mark R. DeLuca	Reg. No. 44,649
Jeffrey C. Hood	Reg. No. 35,198
Robert C. Jahnke	Reg. No. 44,800
B. Noël Kivlin	Reg. No. 33,929
Christopher P. Kosh	Reg. No. 42,760
Robert C. Kowert	Reg. No. 39,255
Lawrence J. Merkel	Reg. No. 41,191
Eric B. Meyertons	Reg. No. 34,876
Louise K. Miller	Reg. No. 36,609
David W. Quimby	Reg. No. 39,338
Eric A. Stephenson	Reg. No. 38,321
Larry D. Thompson	Reg. No. 43,952
David A. Rose	Reg. No. 26,223

each of said attorneys or agents being members or associates of the firm of Conley, Rose & Tayon, P.C., as attorney or agent for so long as they remain with such company or firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive the Letters Patent.

Please direct all communications to:

Lawrence J. Merkel
Conley, Rose & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767-0398
Phone: (512) 476-1400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made herein on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Inventor's Full Name: Kevin J. McGrath

Inventor's Signature: _____ Date: _____

City and State (or Foreign Country) of Residence: Los Gatos, CA Citizenship: U.S.A.

Post Office and Residence Address: 22876 Huchinson Rd., Los Gatos, CA 95033
(Include number, street name, city, state and zip code)

Inventor's Full Name: Michael T. Clark

Inventor's Signature:  Date: 12/17/99

City and State (or Foreign Country) of Residence: Austin, TX Citizenship: U.S.A.

Post Office and Residence Address: 6137 Mordred Ln., Austin, Texas 78739
(Include number, street name, city, state and zip code)